

12x8 Studio Garden Shed FJ Bevel Model with Metal Roof Assembly Manual

Version #2.3 Apr 28, 2022

Stock Code # STU128-FJ-Metal

Thank you for purchasing a 12x8 Studio Garden Shed. Please take the time to identify all the parts prior to assembly.

Safety Points and Other Considerations
Our products are built for use based on
proper installation on level ground and
normal residential use. Please follow the
instruction manual when building your
shed and retain the manual for future
maintenance purposes.

Customers are responsible for ensuring a solid, level, well-draining site for construction.

Please check with your local municipal or county by-laws before ordering this product to confirm it complies with building codes.





- Snow load ratings vary by geographical location. If heavy or wet snowfall occurs, it is advisable to sweep snow off roof frequently.
- If the product is elevated, any structural and building code requirements are solely the customer's responsibility, and should be abided by.
- In areas with high or gusty wind conditions, it is advisable to install the structure securely to the ground.
- Have a regular maintenance plan to ensure screws, doors, windows and parts are tightly affixed.

Customer agrees to hold Outdoor Living Today and any Authorized Dealers free of any liability for improper installation, maintenance and repair.

In the event of a missing or broken piece, call the Outdoor Living Today Customer Support Line @ 1-888-658-1658 within 30 days of the delivery of your purchase. It is our commitment to you to courier replacement parts, free of charge, within 10 business days of this notification. Replacement parts will not be provided free of charge after the 30 day grace period.

All structures purchased from Outdoor Living Today are covered for a period of one year for defects in manufacturing and workmanship. Costs incurred for customer installations are not included.

Failure to use supplied parts included in this kit could result in poor product performance and may void your warranty.

Please contact Outdoor Living Today's Customer Toll Free Line if you plan to deviate from our written instructions.

What to do before my Shed arrives?



• Become familiar with this assembly manual and determine if you can complete the project yourself or will require a professional contractor.



• One helper is recommended to assist in constructing your shed. It generally takes two people over two days to assemble a shed. If you're hiring a contractor, their rate should be in line with that duration of work.



• Clear the construction area and ensure a clear pathway for delivery when the freight company arrives. Remove all debris: roots, grass, rocks, etc.



• Excavate the site. Contact your local utilities company to ensure there are no gas or electric lines buried in the area before digging.



- Decide on the type of foundation you will be using:
 - Concrete slab, or
 - 4-6 inches of crushed gravel with paver stones or 4x4 stringers.


You can find the footprint for your shed on Page 3 of your Assembly Manual.



• If doing the assembly yourself, have all the necessary tools ready to go and in working condition. A list of required tools can be found after the parts list.




Foundation Types for 8x12 Garden Shed

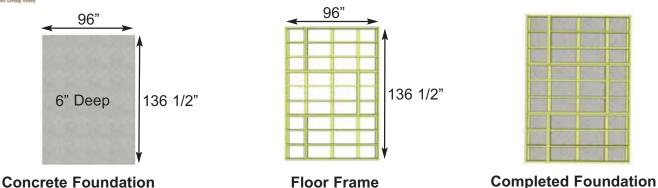

Concrete Slab Foundation:

- Slab must be at least the same size as assembled floor frame (136 1/2" x 96") or larger.
- 6" Deep foundation.
- 1.7 Cubic Yards of concrete required.
- A concrete slab will have the longest durability out of your foundation options.

Once level, a concrete slab is the easiest surface to build on.

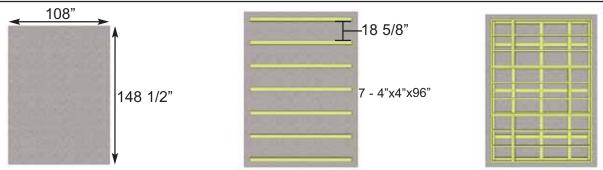

Gravel Foundation Gravel Foundation with treated stringers

Completed Foundation

Gravel with 4x4 Pressure Treated Stringers:

- Excavate at least 6" deep, and 6" wider than floor frame on each side.
- 2.1 Cubic Yards of gravel required, approximatley 19 wheelbarrows.
- 7 4x4 Pressure Treated Stringers 8' long required.
- Evenly spaced, with one at each end of floor frame.

Saves money on materials, easy to level and work with.



Gravel Foundation Gravel Foundation with Patio Pavers Completed Foundation

Gravel with Patio Paver Stones:

- Excavate at least 6" deep, and 6" wider than floor frame on each side.
- 2.1 Cubic Yards of gravel required, approximatley 19 wheelbarrows.
- 25 patio pavers (8" x 8" or larger).
- Center patio paver stones underneath floor runners and underneath seams in floor joists.


Patio paver stones are widely available from most landscape stores.


Thank you for purchasing our 12x8 Studio Garden Shed. Please take the time to identify all the parts prior to assembly.

Please take the time to identify a		assembly.
1. Floor Section Parts List - P	ages 2 and 3	Steps↓
Floors		-
1A: 3 - 45 1/2" x 75" - Floor Joist Frames		1-12
1B: 6 - 1 1/2" x 3 1/2" x 71 3/4" - Center Floor Joists - Unattached		
1C: 3 - 45 1/2" x 21" - Floor Joist Frames		
1D: 3 - 45 1/2" x 75" - Plywood Floor - Large		
1E : 3 - 45 1/2" x 21" - Plywood Floor - Small		
1F : 10 - 1 1/2" x 3 1/2" x 68 3/16" Floor Runners		
2. Wall Section		Steps↓
mani wan i ancis		V
2A: 2 - 48 3/4"w x 80 1/4"h - Front Window Wall Panels		13-20
2B: 7 - 45 1/2"w x 75"h - Solid Wall Panels (Bottom Plates Unattached)		
2C: 7 - 1 5/8" x 2 1/2" x 45 3/8" - Bottom Wall P	lates	
Main Wall Plates		21-22, 30
2D : 5 - 3/4" x 2 1/2" x 65 3/4" - Rear/Side/Middl	e Front	21-22, 30
2E : 2 - 3/4" x 2 1/2" x 35 3/8" - Front		
2F : 2 - 3/4" x 2 1/2" x 27 3/4" - Side		
Rear Extender Walls - Rectangular		23-24
2G: 3 - 45 1/2"w x 9"h - Rear Extender Walls		20-24
Side Gable Walls (Trapezoid Shape)		25-27
2H : 2 - 45 1/2" w x 19" h x 10" h - Rear Side G		20-21
2I: 2 - 45 1/2" w x 28" h x 19" h - Front Side Gable Walls (R/L) Upper Wall Plates		
2J: 2 - 3/4" x 2 1/2" x 68 1/4" - 11 degree angle		28, 30, 34
2K : 2 - 3/4" x 2 1/2" x 68 1/4" - 11 degree angle 2K : 2 - 3/4" x 2 1/2" x 68 1/4" - 11 degree angle		20, 00, 04
Door Jambs	- Neai	
2L : 2 - 3/4" x 3 3/8" x 80 1/4" - Vertical Door Jan	mbe	29
Upper Front Walls	1105	
2M : 2 - 48 1/2"w x 22 3/4"h - Upper Front Wind	ow Walle	31-33
2N: 1 - 39 1/2"w x 22 3/4"h - Centre Upper From		0.00
3. Rafter & Roof Section		Stanal
Rafters		Steps↓
3A: 14 - 1 1/2" x 3 1/2" x 47" - Rafters (11° angl	e cut on ends)	37-47
3B : 14 - 1 1/2 x 3 1/2 x 47 - Rafters (11 angles)		31-41
3C : 4 - 1 1/2" x 3 1/2" x 59 1/2" - Rafter Facia (
Rafter Spacers	anglo out on chus)	
3D: 2 - 1/2" x 2 1/2" x 60" Plywood Spacer Jig -	Sides	40-49
3E: 1 - 1/2" x 2 1/2" x 44 7/8" Plywood Spacer 3		13 -13
3F: 2 pcs - Front Rafter Overhang Spacer - 14		
Roof Battens(20)		
3G : 8 pcs - 3/4" x 3 1/2" x 72" Roof Batten (Lon	g)	50-60
3H : 12 pcs - 3/4" x 3 1/2" x 48" Roof Batten (Sh		
Roof Panels (8)		
3I: 4 - 39" wide x 86" long - Metal Roof Panels	(Long)	61-69
3J: 4 - 39"wide x 41" long - Metal Roof Panels		
Facia/Roof Nailing Strips		
3L: 2 - 3/4" x 1 1/2" x 72"		70
3M : 2 - 3/4" x 1 1/2" x 44"		
4. Trim Section		Steps↓
Soffits Front		-
4A : 2 - 3/4" x 3" x 14" (Outside L/R Cap)		71-74
4B : 8 - 3/4" x 3 1/2" x 67" (Tongue & Groove)		
4C: 2 - 3/4" x 2 1/4" x 67" (Tongue cut off - positioned against shed)		
4D : 1 - 1/2" x 2 1/2" x 13 3/4" (Center Cap)	- ,	

4. Trim Section Cont.	Ctono
Soffits Rear	Steps
4E : 2 - 3/4" x 3" x 6 1/2" (Outside L/R Cap)	75- 76
4F: 2 - 3/4" x 3 1/2" x 67" (Tongue & Groove) 4G: 2 - 3/4" x 3" x 67" (Tongue cut off - positioned against shed)	
4H: 1 - 1/2" x 2 1/2" x 5 1/4" (Center Cap)	
Top Horizontal Wall Trim	
4I : 1 - 1/2" x 1" x 39" - Front	77
4J : 2 - 1/2" x 1" x 48 3/4" - Front 4K : 3 - 1/2" x 1" x 45 1/2" - Rear	
Facia Trim	
4L: 4 - 3/4" x 5 1/2" x 72 3/4" - Front/Rear	78-82, 85
4M: 4 - 3/4" x 5 1/2" x 60" - Side (11° cut ends- mirror Image)	ŕ
4N : 3 - 1/2" x 7 1/2" w x 5 1/2" - Facia Detail Plates	
Metal Roof Drip Cap (3)3K: 3 pcs - 6" x 60" (angled)	83-84
Bottom Skirting Trim	
Side and Rear	86-88
40: 7 - 1/2" x 4 1/2" x 45 1/2" - Bottom Skirting Front	00-00
4P: 1 - 1/2" x 4 1/2" x 39" - Center Bottom Skirting	
4Q: 2 - 1/2" x 4 1/2" x 48 3/4" - Outside Bottom Skirting Corner & Wall Trim	
Filler	
4R: 4 - 3/4" x 2 1/2" x 72" - Filler Trims (all corners)	89
4S : 2 - 3/4" x 2 1/2" x 28 1/2" - Filler Trims (Front top)	
4T : 2 - 3/4" x 2 1/2" x 12" - Filler Trims (Rear top)	
Corner 4U: 2 - 1/2" x 2 1/2" x 46" - Top Front Narrow Corner (22° scarf cut)	90-92
4V: 2 -1/2" x 5 1/2" x 46 -1 op Front Narrow Corner (22" scarr cut)	90-92
4W : 2 - 1/2" x 2 1/2" x 62" - Bottom Front Narrow Corner (22° scarf cut)	
4X: 2 - 1/2" x 5 1/2" x 62" - Bottom Front Side Wide Corner (22° scarf cut)	
4Y: 2 - 1/2" x 5 1/2" x 91" - Rear Side Wide Corner (11° cut top - mirror)	
4Z : 2 - 1/2" x 2 1/2" x 89" - Rear Corner Narrow	
Side 4AB: 2 - 1/2" x 2 1/2" x 37 3/4" - Top Side (22° scarf /11° cut top - mirror image)	93
4AC : 2 - 1/2" x 2 1/2" x 62" - Bottom Side (22° scarf cut)	
Rear	
4AD : 2 - 1/2" x 2 1/2" x 89" - Rear Walls	94
Pre-Hung Door (Fiberglass - primed white)	95-96
suggest doing it prior to construction	90-90
Door Trim	
4AF : 1 - 1/2" x 1 3/4" x 40" - Above Door Filler Trim (Bevel-install thick end up)	97-98
4AG : 2 - 1/2" x 2 1/2" x 84" - Vertical Door Trim	
4AH: 1 - 1/2" x 3" x 44 1/2" - Horizontal Door Trim (angle cut - bottom corners) Windows	
4AI: 2 - Large Window Inserts - 30 1/4"w x 35" h	99-102
4AJ: 3 - Transom Window Inserts - 35"w x 10 1/8" h	
Window Trim Pkgs	
4AK: Large Windows (2 Pkgs)	103
Top-1 -36 1/4" 11° cut / Sides - 2 -36 1/8" sq.cut / Bottom- 1 -35 1/4" sq.cut 4AL: Transom Windows (Left/Right) 2 Pkgs	
Top-1 - 41" 11° cut / Sides- 2 -10 5/8" sq.cut / Bottom-1 -40" sq.cut	104
4AM: Transom Window (Center) 1 Pkg	
2 Horizontal - 35 3/4" - sq.cut / 2 Vertical - 20 1/2" - sq.cut	105
Miscellaneous Pieces	
4AN: 2 pc - Spare Wall Siding (48 1/2" long)	
4AO: 8 pcs - Shim Shingles- use to shim door, etc.	
4AP: Several pcs - Foam Enclosures for Metal Roof	

12X8 Studio Garden Shed - Metal Roof - HARDWARE PACKAGE

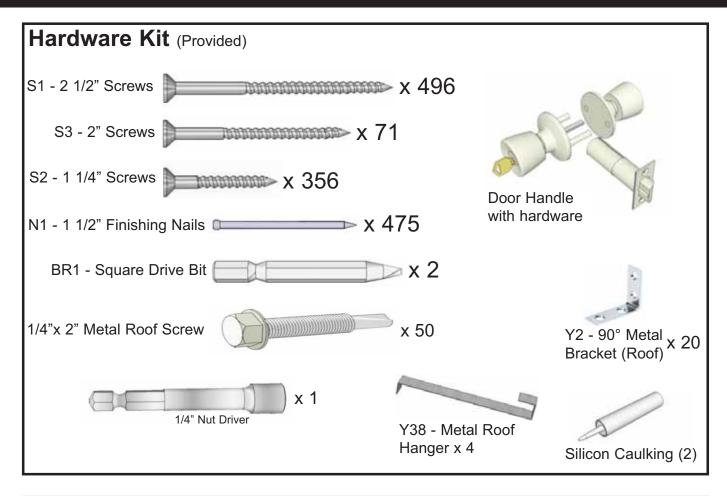

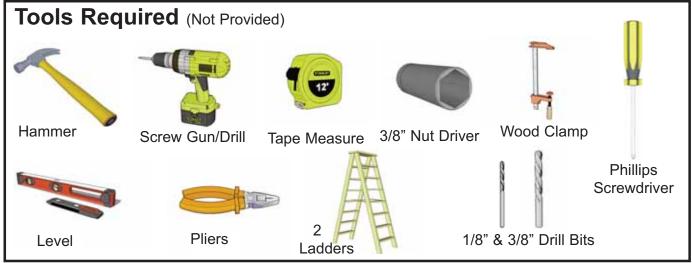






Regular Maintenance & Tips to prolong the life of your shed.


Before/During Assembly:


- 1.) Paint each face and edge of your plywood floor with a latex exterior paint.
- 2.) Caulk wall seams if gaps appear.
- 3.) Caulk around window framing.
- 4.) Caulk perimeter between floor plywood and bottom wall plate.
- 5.) Caulk channels in lap siding at the top of your door above the trim, just a drop in each channel.
- 6.) Caulk edge of door threshold.
- 7.) Optional: Install a Sill Gasket between floor runners and foundation.
- 8.) Optional: Install an 8" strip of roofing paper below Cedar Ridge Caps for Cedar Roof Sheds.




















Routine Maintenance:


- Routinely check all fasteners are tight (ex. Door Hinges, Nails)
- Brush off dirt from walls.
- Brush off snow from roof regularly.
- Routinely remove needles and leaves from roof.


Painting/Staining

- Your cedar shed, if left untreated, will weather to a silvery grey colour.
- Painting or staining your structure is highly recommended and will prolong the life of your shed.
- You do not need to wait to paint or stain your shed, the wood in your kit has been dried and can be stained or painted immediately.
- Consult your local paint store for the best paint or stain for cedar.
- Optional: stain the inside of your shed. (Note: this will remove the fresh cedar smell.)

1. Floor Section


Exploded view of all parts necessary to complete Floor Section. Identify all parts prior to starting. Note: Floor Footprint is 136 1/2" wide x 96" deep.

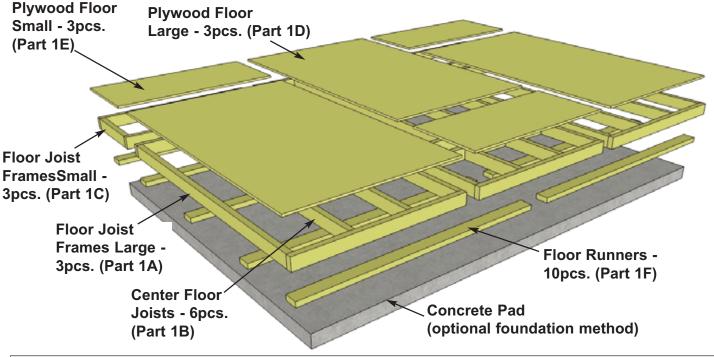

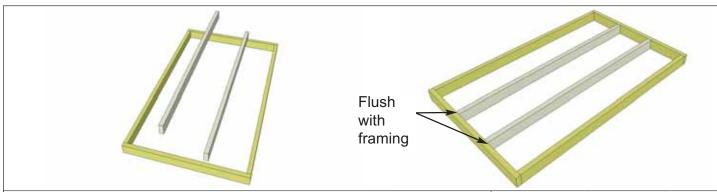


 Lay out 1A - Floor Joist Frames and two of 1B - Floor Joists as illustrated above. Position Joists equally in Floor Joist Frame. Use **1C - Small Floor Joist Frame** as a template to determine joist position. Position Joist so flush with framing.

Parts (Steps 1 - 2) 1A - Large Floor Joist Frames (45 1/2" x 75") x 3 1B - Floor Joists (1 1/2" x 3 1/2" x 71 3/4") x 6

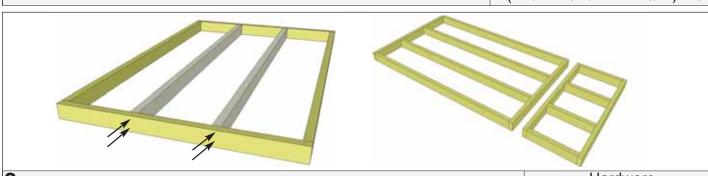

2. When correctly positioned, attach each Joist with 4 - 2 1/2" screws (2 per end). You can find the Square Drive Screw Bit in the Hardware Kit Bag. Complete 2 remaining Large Floor Joist Frames.


Hardware S1 - 2 1/2" Screws x 24 total

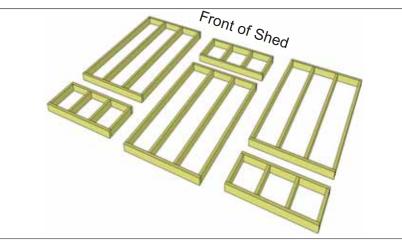

3. Lay out **1A & 1C - Floor Joist Frames** as illustrated. There are 3 larger and 3 smaller Frame Sections. The Footprint for the floor when attached together will be 136 1/2" wide x 96" deep.

5. Complete all large and small frame attachments. Screw each completed section together with **8 - 2 1/2" screws**.

Hardware
S1 - 2 1/2" Screws
x 16 total




7. Attach **1F - Floor Runners** to completed floor frame. There are 2 floor runners per 136 1/2" side and 5 completed runners in total. Use **3 - 2 1/2" screws** per runner section.

Parts (Steps 7 - 9) **1F - Floor Runners**(1 1/2" x 3 1/2" x 68 3/16") **x 10**


Hardware (Steps 7 - 9)
S1 - 2 1/2" Screws
x 30 total

You can find BR1 - Square Drive Bit for the screws in with the Hardware Kit Bag.




4. Attach each large and small floor joist frame together with **6 - 2 1/2" screws** per section.


<u>Hardware</u> (**S1 - 2 1/2" Screws**) x 18 total



6. When completed, your floor footprint should be 136 1/2" wide x 96" deep.




8. Make sure Runners are flush with outside and front and rear floor framing but not overhanging.




Foundations

Note: The floor will be flipped over and the floor runners will sit on your foundation. It is important to note, that having a level foundation is critical. Choosing a foundation will vary between regions. Typical foundations can be concrete pads or patio stones positioned underneath the floor runners.

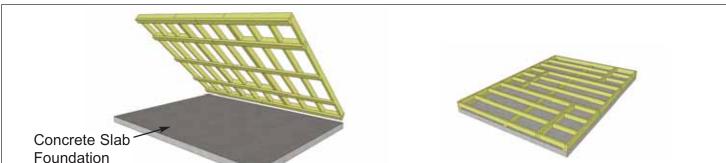

10. With Floor Runners attached, carefully flip the floor over and place on your foundation. **Caution:** you will need 2 people to assist you. Be careful when laying floor down not to bend or twist floor. When in place, level floor completely.

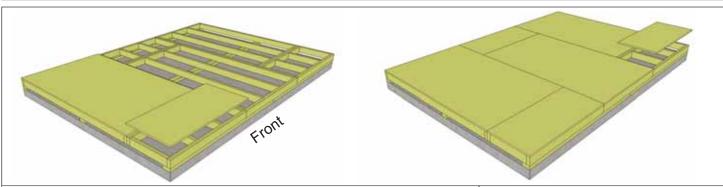

11. Position parts **1D** & **1E - Plywood Floor** on top of completed floor joists. Plywood will sit flush with outside of floor joist frame.


Parts

1D - Plywood Floor - Large
(5/8" x 45 3/8" x 74 7/8") x 3

1E - Plywood Floor - Small
(5/8" x 45 3/8" x 20 7/8") x 3


12. With Plywood positioned correctly on floor framing, attach with **1 1/4" Screws**. Use screws every 16" around perimeter of each large floor section and 3 screws through each mid joists. Adjust for smaller floor sections accordingly.

Hardware
S2 - 1 1/4" Screws
x 100 total (approx.)

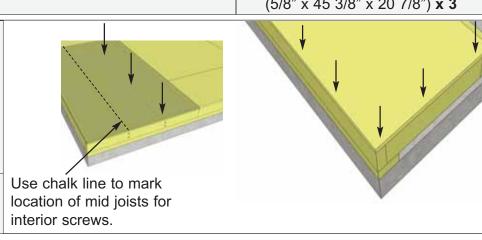

2. Wall Section

Exploded view of all parts necessary to complete the Wall Section. Identify all parts prior to starting.

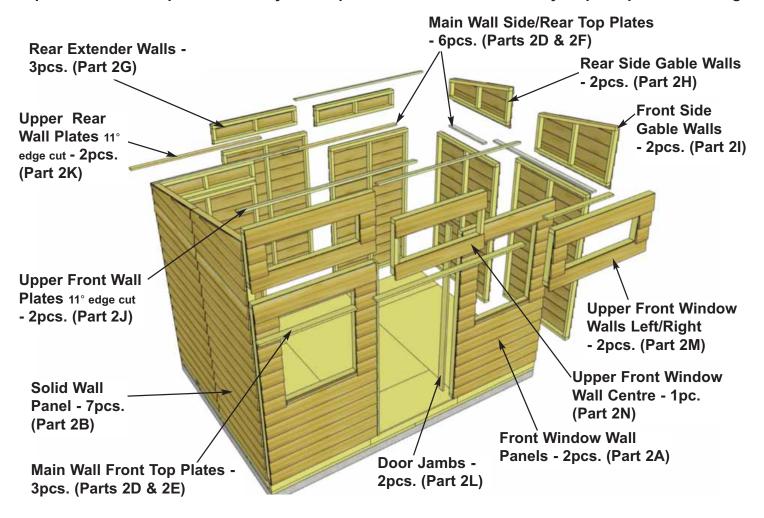


13. Identify all wall section components and become familiar with their location.

There will be 2 Window Wall Panels, 7 Solid Wall Panels, 4 trapezoid shaped Side Gable Walls, 3 Rear Extender Walls and Top Plates (upper and lower).

Make sure to position panels right side up so water is directed away from and not into shed. Look at window wall panels to determine proper wall position to confirm.


(Walls may have a QC colored dot on them, these won't be visible on the shed, please ignore them).

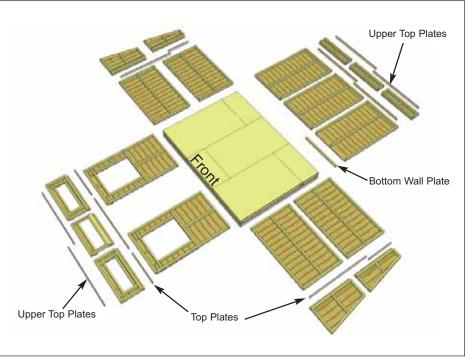




14. Carefully lay **2B - Solid Wall Panels** face down. Position and attach **2C - Bottom Wall Plates** to bottom of wall studs of each wall panel with **3 - 2 1/2" Screws**. Position so plates are flush with framing.


2B - Solid Wall Panels (45 1/2" wide x 75" high) x 7 2C - Bottom Wall Plates (1 5/8" x 2 1/2" x 45 3/8") x 7 Hardware
S1 - 2 1/2" Screws
x 21 total

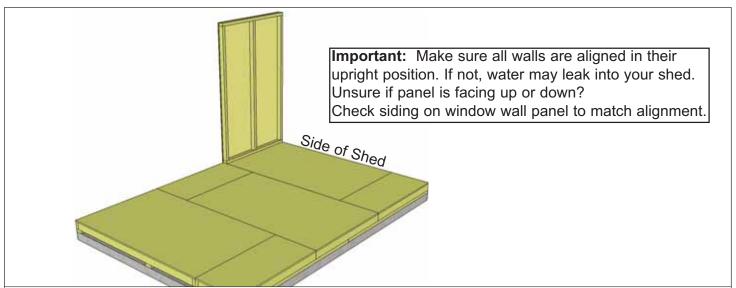

15. Starting at Rear Corner, position a Solid Wall Panel on top of plywood floor. The Wall Panel bottom framing will sit flush with plywood. Wall siding will overhang the floor.

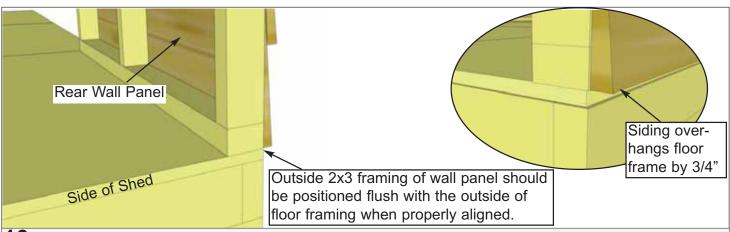


16. The rear wall panels will sit even with the floor frame and the sidewall panels will be sandwiched between the front and rear wall panels. The floor plywood may be slightly recessed. **Note:** Siding will overhang the floor frame by approximately 3/4".

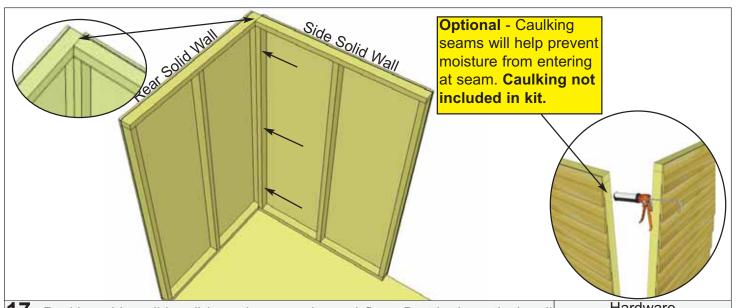


17. Position side solid wall into place on plywood floor. Butt both vertical wall studs of side and rear walls together and attach with **3 - 2 1/2" Screws**. Screw at the bottom, middle and top of stud to secure properly.


Hardware
S1 - 2 1/2" Screws
x 3 total

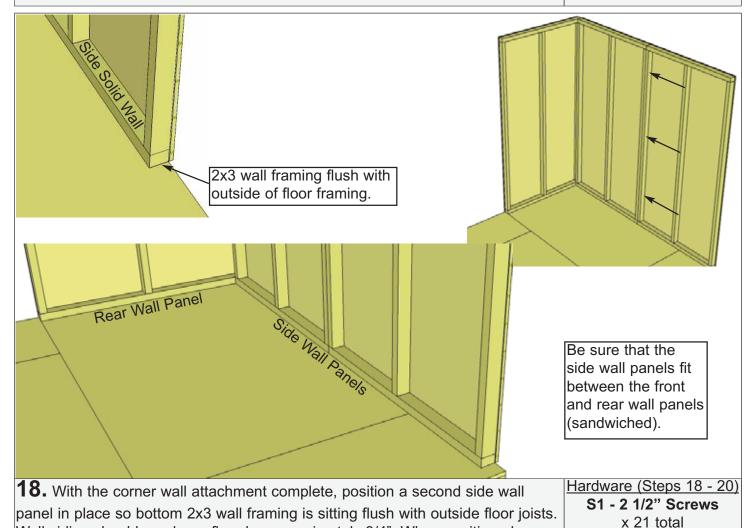


Wall siding should overhang floor by approximately 3/4". When positioned

correctly, attach both side wall panel studs together as per Step 17.

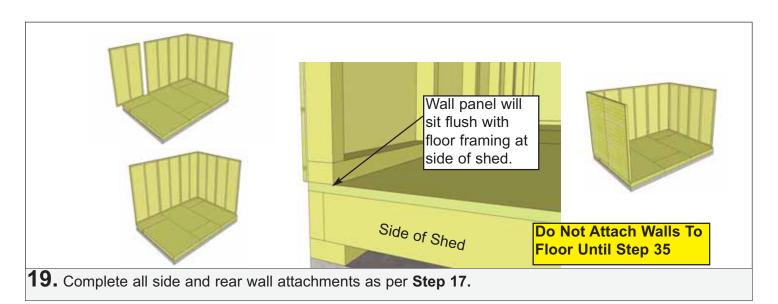

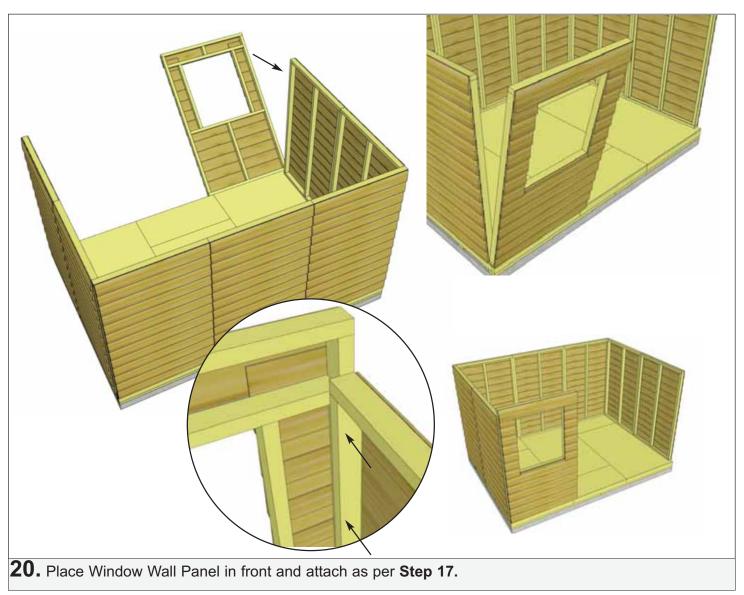

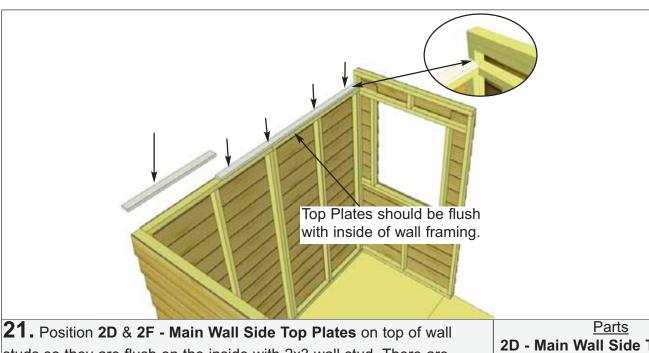


21. Position **2D** & **2F - Main Wall Side Top Plates** on top of wall studs so they are flush on the inside with 2x3 wall stud. There are 2 plates per side - 1 long & 1 short. Attach by screwing down into top wall framing with **4 - 2" Screws** per long plate & **3 - 2" Screws** per short plate.


2D - Main Wall Side Top Plates (3/4" x 2 1/2" x 65 3/4") x 2 2F - Main Wall Side Top Plates

2F - Main Wall Side Top Plates (3/4" x 2 1/2" x 27 3/4") **x 2**

Hardware (S3 - 2" Screws) x 14 total

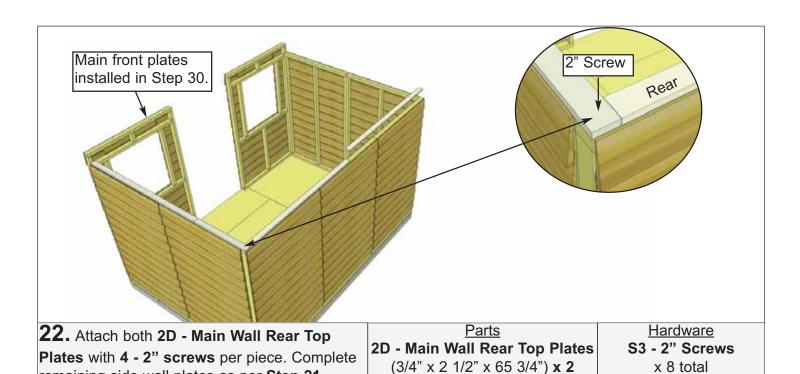


remaining side wall plates as per Step 21.

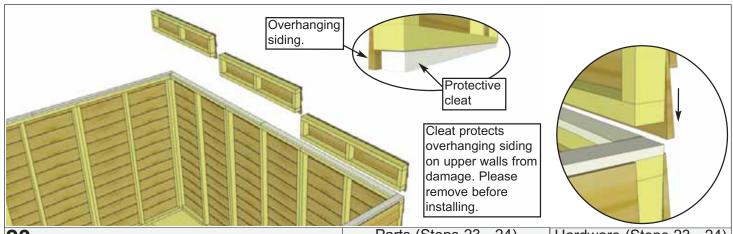


23. Place 2G - Rear Extender Walls on rear wall plate with bottom siding overlapping that of the rear wall.

Parts (Steps 23 - 24) 2G - Rear Extender Walls (2G - 45 1/2" wide) x 3

Hardware (Steps 23 - 24) S1 - 2 1/2" Screws x 12 total

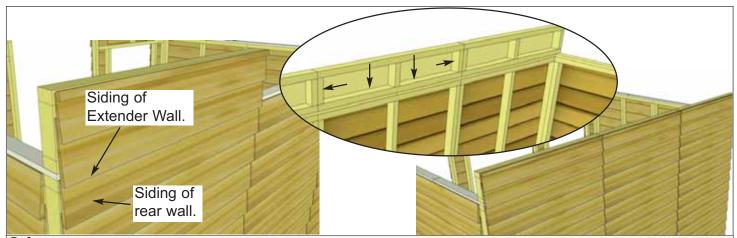


24. With 2x3 wall framing aligned, attach extender walls to rear wall top plate with 4 - 2 1/2" Screws per wall.

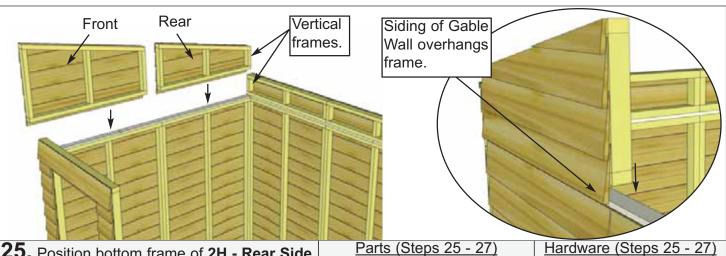


25. Position bottom frame of **2H - Rear Side** Gable Wall onto side wall top plate. Align so gable wall and side wall 2x3's are even. Rear gable vertical frame will sandwich against extender vertical frame.

2H - Rear Side Gable Walls (2H - Right/Left Pair) x 2 21 - Front Side Gable Walls (2I - Right/Left Pair) x 2


S1 - 2 1/2" Screws x 22 total

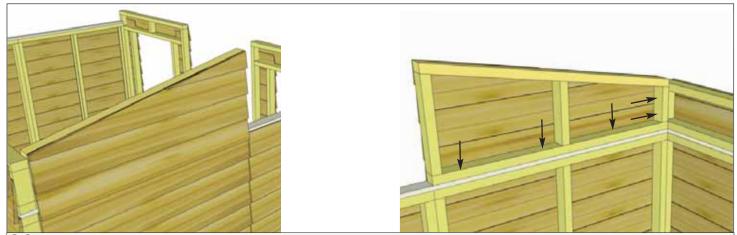

26. From the outside, siding of gable will overlap side wall. When aligned, secure gable with5 - 2 1/2" Screws. On a ladder, push extender wall and gable wall together tight and then screw.

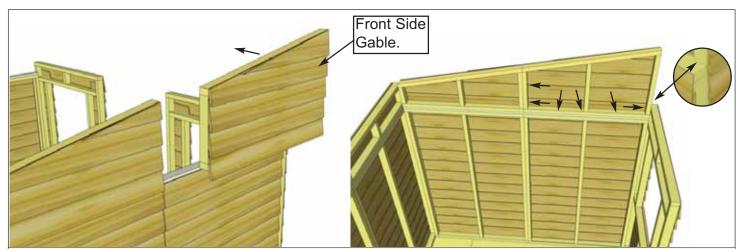


27. Position bottom frame of **2I - Front Side Gable Wall** onto side wall top plate. Align so gable wall and side wall 2x3's are even. Front gable vertical frame will sandwich against front window wall vertical frame. When correctly aligned, attach with **6 - 2 1/2" Screws**. Complete other side the same.

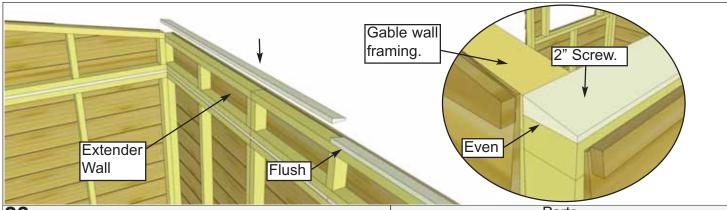

28. Position **2K - Rear Upper Wall Plates** on rear extender wall framing, flush with inside of extender framing and even with outside wall. Attach each piece with **4 - 2" Screws**.

<u>Parts</u> **2K - Rear Upper Wall Plates -** *11*° *angle on face*(3/4" x 2 1/2" x 68 1/4") **x 2**

Hardware (S3 - 2" Screws) x 8 total

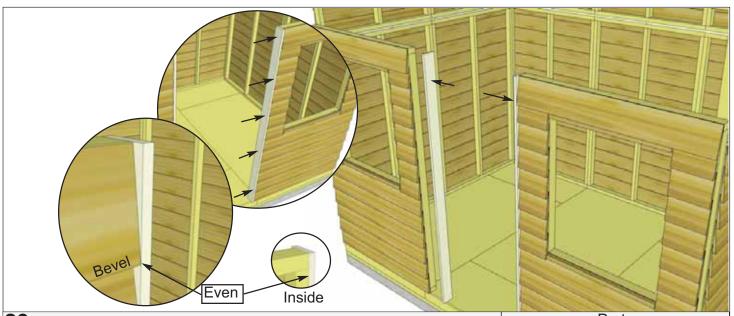


29. Position **2L - Door Jambs** against window wall vertical framing. Jamb should sit even with the thick bevel siding on the outside and even with framing on the inside. Attach with **5 - 2 1/2" Screws** / piece.

Parts
2L - Door Jambs
(3/4" x 3 3/8" x 80 1/4") x 2

Hardware

(S1 - 2 1/2" Screws) x 10 total

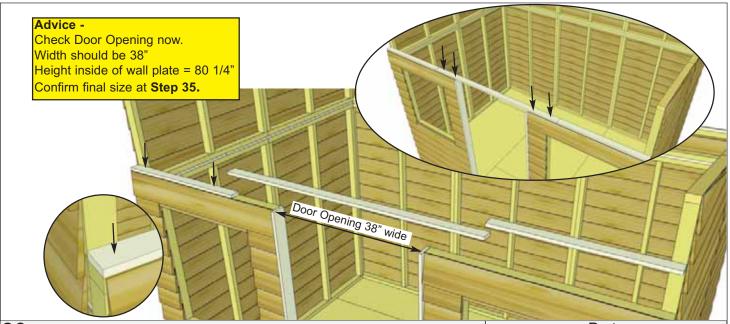

30. Position **2D** & **2E** - **Main Wall Front Top Plates** on top of window wall framing so they are flush on the inside with 2x3 wall stud. Align plates on wall as per **Step 21**. There are 2 outside smaller plates (**2E**) and 1 longer center plate (**2D**). Attach by screwing down into top of wall framing with **2** - **2**" **Screws** per shorter plate and **4** - **2**" **Screws** on the center plate.


Parts

2D - Main Wall Front Top Plate (3/4" x 2 1/2" x 65 3/4") x 1

2E - Main Wall Front Top Plates (3/4" x 2 1/2" x 35 5/8") x 2

Hardware

(S3 - 2" Screws) x 8 total

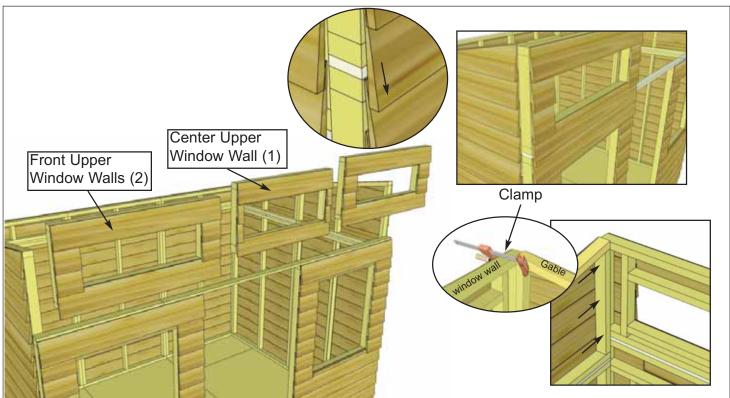


31. Starting with a **2M** - **Upper Front Window Wall** - **Side**, place on front main wall top plate in corner. Upper wall siding will overhang lower window wall siding. Line up vertical gable framing with upper window framing and clamp together. Screw frames together with **3** - **2** 1/2" **screws**.

Parts (Steps 31 - 33)


2M - Upper Front Window Walls - Sides (2M - 48 1/2" wide) x 2

2N - Upper Front Window Wall - Center (2N - 39 1/2" wide) x 1


<u>Hardware (Steps 31 - 33)</u> (**S1 - 2 1/2" Screws**) x 21 total

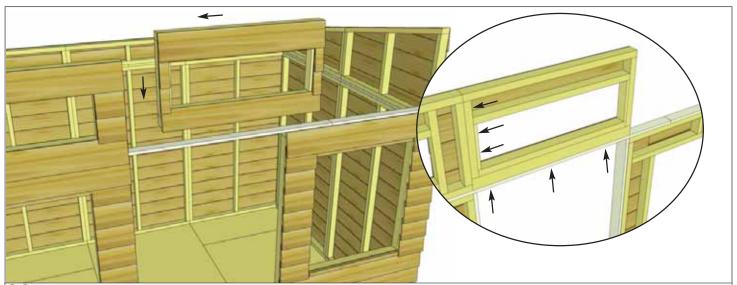



32. Position **2N - Upper Front Window Wall - Center** on front main wall top plate tight against the previously installed upper window frame. Line up vertical gable framings and screw frames together with **3 - 2 1/2" Screws**. Use clamp to keep frames together tight. From underneath, attach **3 - 2 1/2" Screws** from the plate into the bottom of the window frame.

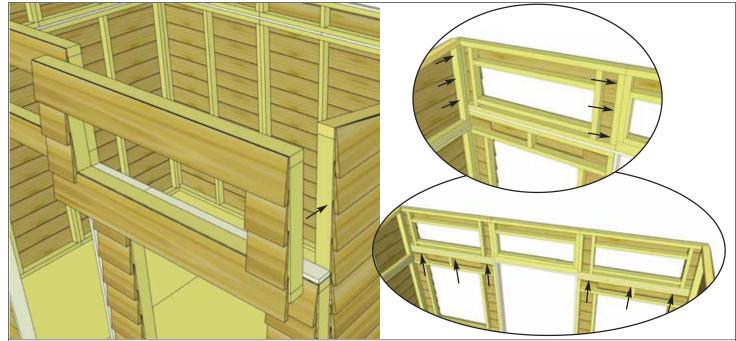

33. Position and attach the remaining **2M - Upper Front Window Wall - Side** on front main wall top plate in corner as per **Step 31**. Clamp frames together to keep frames tight. To complete, screw both outside upper window panels from underneath window wall framing with **3 - 2 1/2" Screws** per panel.

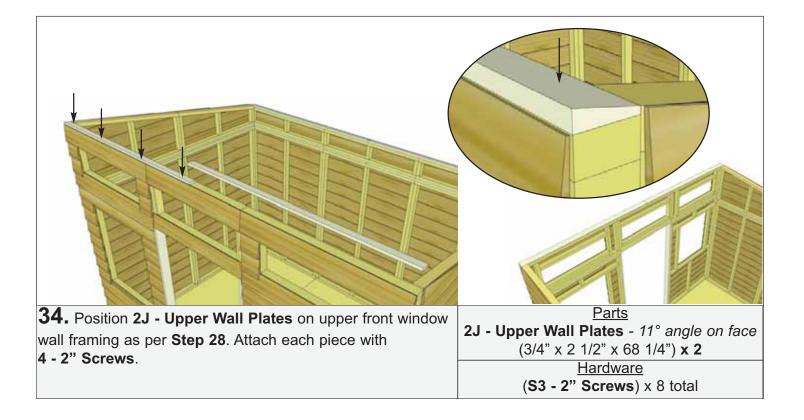







35. When all walls are attached together, check alignment with the floor. Bottom wall framing should sit flush with outside of floor framing. **Adjust for best fit**. Confirm 38" wide door opening at top and bottom. When positioned correctly, fasten bottom wall plates to floor using **4 - 2 1/2" Screws** per wall panel. Check diagonal measurement in each floor corner to confirm it is square.

Hardware
S1 - 2 1/2" Screws
x 36 total

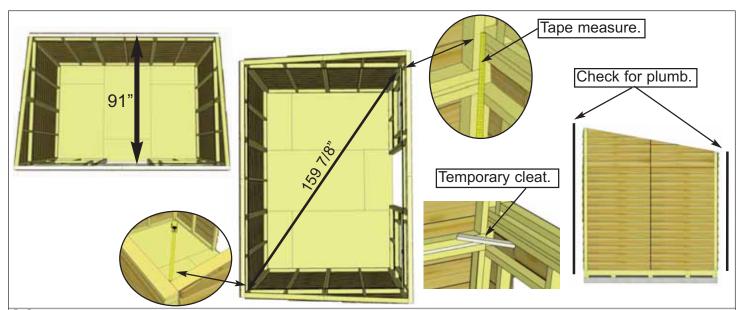

36. Prior to installing rafters, take time to confirm your walls are level, square and plumb. Measure diagonal at the height of back wall to opposing corner for square. If not within 1/2", your walls are not square. Adjusting now will make it easier to install the roof section. Make sure front to rear inside frame width is 91". Also check walls for plumb. Tip - once satisfied, cleat each corner temporarily with some scrap wood (not included) to keep walls from moving.

3. Rafter & Roof Section

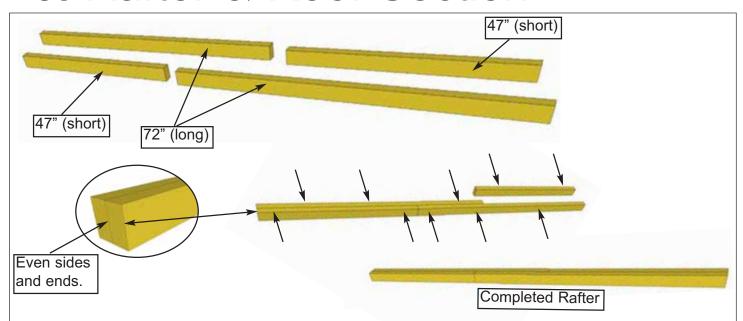

37. Rafters need to be assembled before laying of roof. There will be 7 completed rafters when pieces are attached together. There are 4 pieces of "2x4" for each rafter. **2 pcs of 47" Length & 2 pcs of 72" Length**. When attached together, total length of rafter will be 119". On solid ground, locate 2 of **3A - Rafter Sections -Short** and 2 of **3B - Rafter Sections -Long** and position as illustrated above. Starting on one side, line ends and sides up even. Use clamp to hold in position. Attach together with **10 - 2 1/2" Screws**.

Parts (Steps 37 - 38)

3A - Rafter Sections -Short
(1 1/2" x 3 1/2" x 47") x 14

3B - Rafter Sections -Long
(1 1/2" x 3 1/2" x 72") x 14

Hardware (Steps 37 - 38)

S1 - 2 1/2" Screws
x 70 total




38. Complete attachments of all 7 Rafters now.


Hint - Occasionally wood can twist, use clamps to straighten as best you can before screwing.

Important

You will need two large ladders (7 ft or 8ft high) during most of the remaining steps of this manual.

39. Before attaching rafters measure between gable wall framing. Make sure distance between inside framings is 131 1/2". Be sure to evenly space rafters on framing before attaching in **Step 40**.

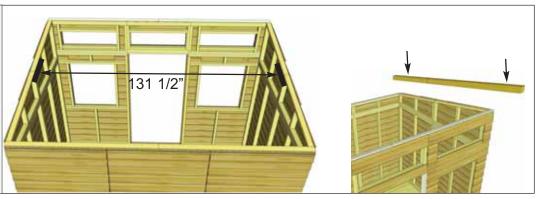


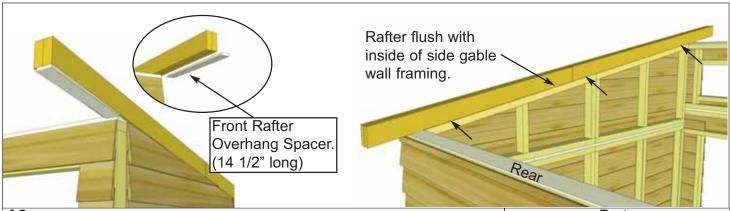

40. Position Rafter on gable wall framing. Locate **3F - Rafter Overhang Spacer** and place underneath front of rafter flush against upper wall plate to determine front rafter overhang position. Inside of rafter should sit flush with inside of gable wall framing. Clamp in position but don't attach yet. Position opposite outside rafter as described and clamp in place as well.

Parts


3F - Rafter Overhang Spacer
(3F - 14 1/2" length) x 2

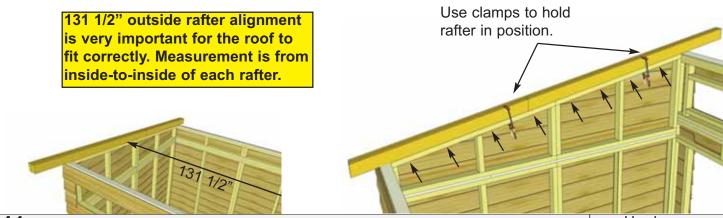


41. Before attaching, measure rafter spacing to confirm 131 1/2" and make adjustments as necessary. With Rafter correctly positioned, attach to side gable wall framing with **8 - 2" Screws**. Screw up from below the framing into rafter. Position other outside rafter as above. Inside to inside measurement of rafters should be 131 1/2".

Hardware
S3 - 2" Screws
x 16 total

42. Lift and place remaining 5 rafters on upper wall plates. Space equally apart for now.

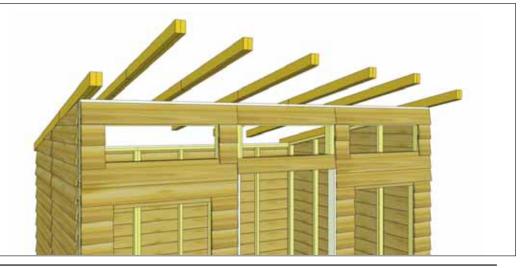

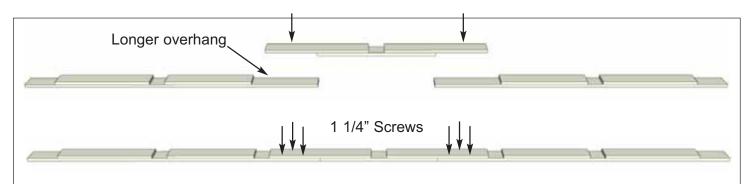

43. To assist in rafter alignment, you will need to assemble the Rafter Spacer Jig (3 pcs made with plywood). Align the center piece with the longer overhang of the side pieces as shown above. Attach with **3 - 1 1/4" Screws** in a triangular formation per side. After using Spacer Jig to align the rafters in **Steps 44** & **46**, it will be permanently fastened to the center of the roof in **Step 48**.

Parts

3D - Plywood Rafter Spacer Jig - Sides (2 1/2" x 68 3/4") x 2


3E - Plywood Rafter Spacer Jig - Center (2 1/2" x 48") x 1


<u>Hardware</u>

S2 - 1 1/4" Screws x 6 total

44. Place completed Rafter Spacer Jig on top of the roof rafters in the front. Position interior rafters so they fit in jig spacers as shown to the right. Use the Front Rafter Overhang Spacer to correctly position rafters from front to rear.

Expert Advice - prior to attaching rafters, refer to Step 36 and check that walls are still level, square and plumb.

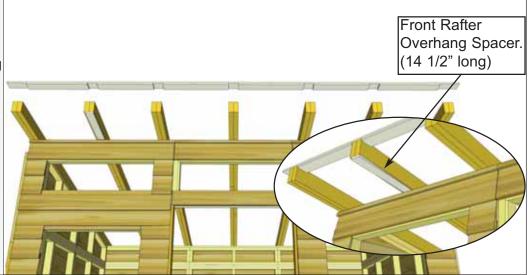

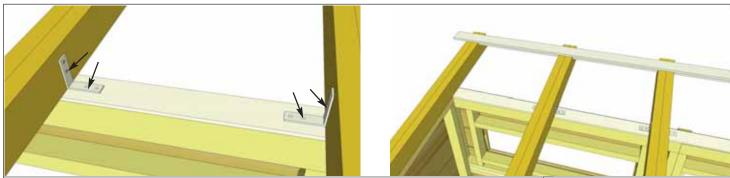


45. With Rafter correctly positioned using the overhang spacer, attach a **90° Metal Bracket** to each side of rafter and to the front upper wall top plate. Use **4 - 1 1/4" Screws** per bracket. Proceed to next rafter. Use overhang spacer to position rafters correctly front to back and attach with two 90° brackets as described. Complete all remaining front interior rafter attachments.

<u>Hardware</u>


S2 - 1 1/4" Screws x 40 total

Y2 - 90° Metal Bracket x 10 total

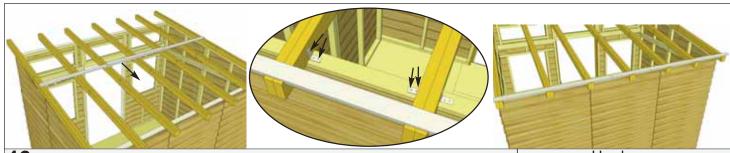

46. Slide Rafter Spacer Jig down to the rear. attach a **90° Metal Bracket** to each side of rafter and to the rear wall top plate. Use **4 - 1 1/4" Screws** per bracket. Complete all rear attachments of remaining interior rafters.


Hardware (S2 - 1 1/4" Screws) x 40 total (Y2 - 90° Metal Bracket) x 10 total

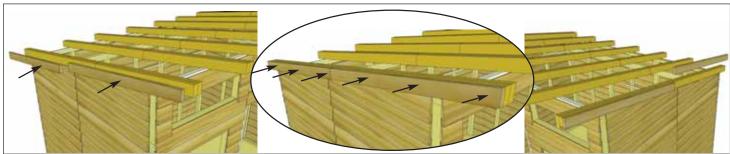


47. Locate **3C - Rafter Facia**. Position 2 pcs on outside rafter carefully lined up with ends and sides. Attach each piece with **3 - 2 1/2" Screws**. Complete both sides.

Parts
3C - Rafter Facia
11° angle cut ends
(1 1/2" x 2 1/2" x 59 1/2") x 4

<u>Hardware</u> (**S1 - 2 1/2" Screws**) x 12 total

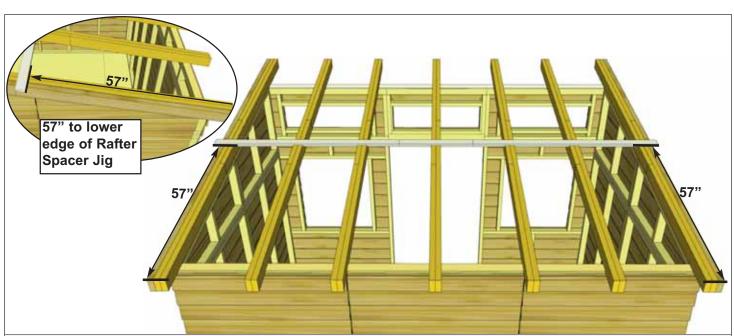



48. Measure 57" from the rear of outer left and right rafters and mark location to fasten Rafter Spacer Jig. This will help stabilize the rafters and make it easier to put the roof panels on in **Step 50**. Check Squareness of walls again as in **Step 36** before fastening rafters.

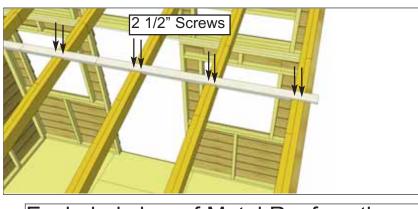



49. Screw down Rafter Spacer Jig onto Rafters with **2 - 2 1/2" Screws** per rafter assembly.

Hardware
S1 - 2 1/2" Screws
x 14 total

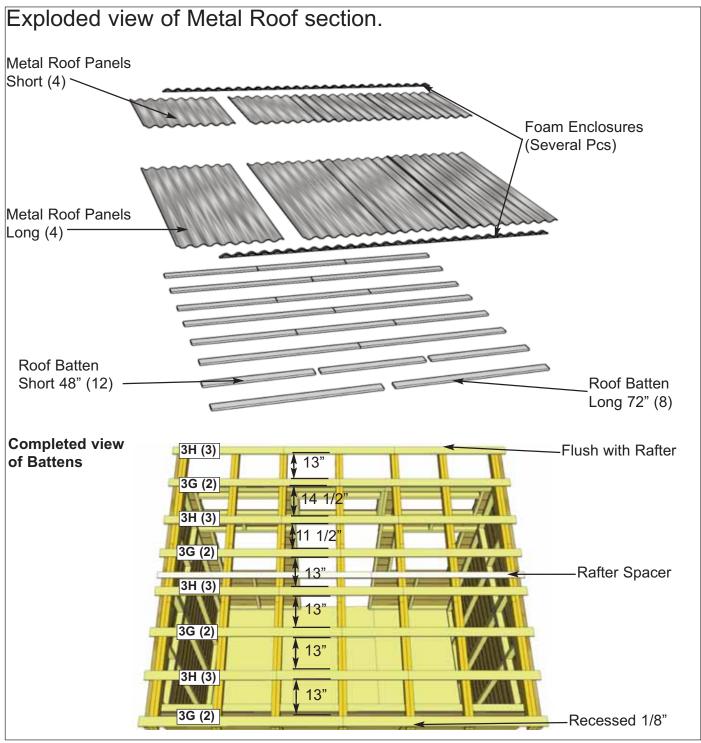



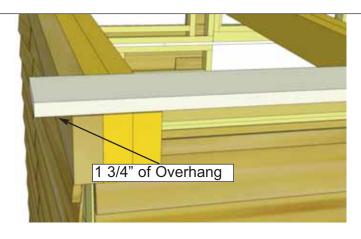





50. Locate **3G - Long Roof Battens** and start at the rear of shed. Place Batten on Rafters. Batten should be recessed 1/8" from end of Rafters. Batten should be centered on middle Rafter. Batten will overhang edge of Rafter Facia by approximatley 1 3/4" when centered on middle Rafter. Predrill pilot holes with an 1/8" bit to prevent splitting. Secure Batten to Rafters with **4 - 1 1/4"screws**.


Parts (Steps 50 - 59)

3G - Roof Batten (Long)
(3/4" x 3 1/2" x 72") x 8

3H - Roof Batten (Short)
(3/4" x 3 1/2" x 48") x 12

Hardware




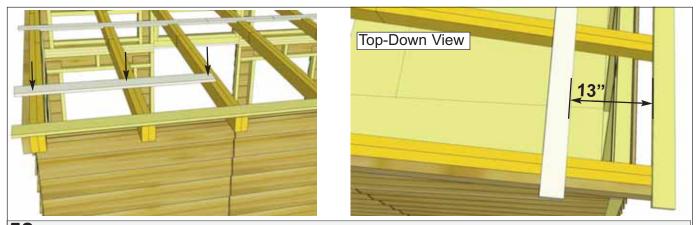


52. Locate **3H - Roof Batten Short.** Place Batten on Rafters 13" up from first Batten. Pre-drill pilot holes with 1/8" bit. Secure with **3- 1 1/4" screws**.




53. Locate two more **3H - Roof Batten Short** and line up as shown above. Maintain 13" between long and short Battens all the way across. Pre-drill pilot holes with 1/8" bit and secure each Short Batten to Rafters with **3 - 1 1/4" screws** each.

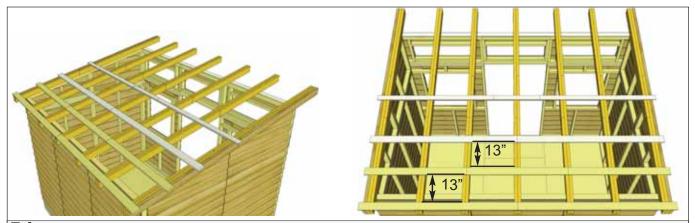


54. Third row of Battens will use **3G - Long Roof Battens**. Place Battens 13" up from second row of Battens. Follow attachment as per **Steps 50-51**.

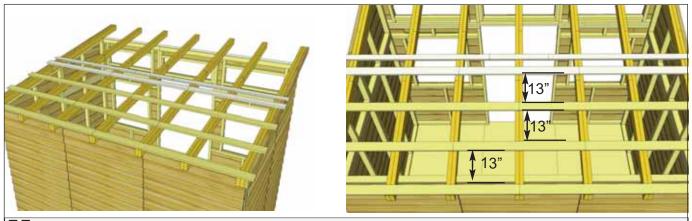


55. Fourth row of Battens uses **3H - Roof Batten Short**. Place and attach 13" up from third row of Battens as per Steps 52-53.

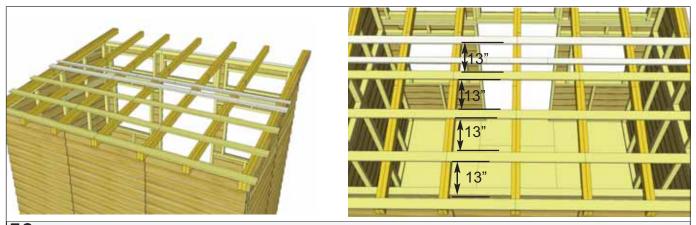


56. Fifth row of Battens uses **3G - Roof Batten Long**. Place and attach 13" up from fourth row of Battens as per Steps 50-51. Be sure to measure from fourth row of Battens and not from the rafter spacer.

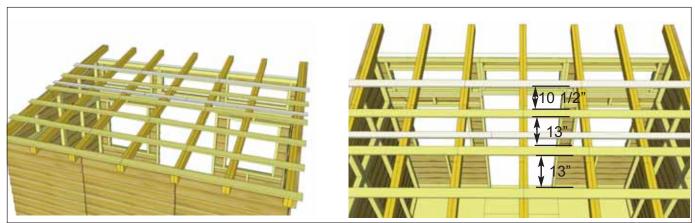


57. Sixth row of Battens uses **3H - Roof Batten Short**. Place and attach 10 1/2" up from fourth row of Battens as per Steps 52-53. Different Spacing is to accommodate overlap of Metal roof Panels in Step 64. Do not attach yet.

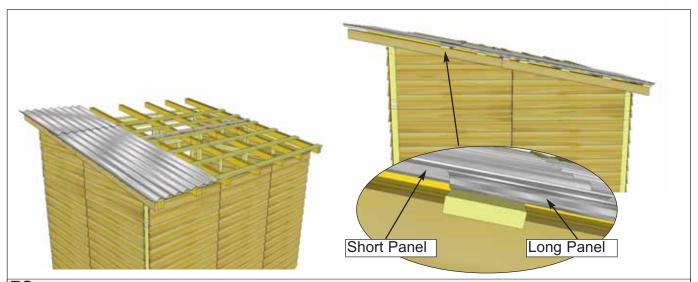


58. Before attaching sixth row of Battens grab one of each **3I - Metal Roof Panels Long** & **3J - Metal Roof Panels Short.** Lineup panels on roof as per **Steps 61 & 66** to ensure a proper fit. Short roof panel should overlap long roof panel on the sixth Batten as shown above. Once panels fit correctly remove and secure Battens.

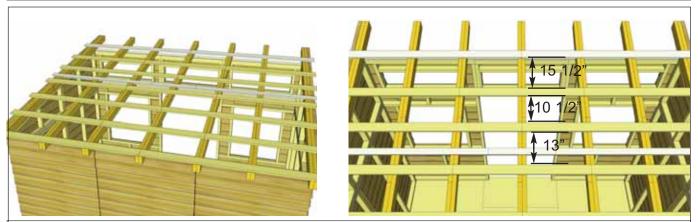

59. Seventh row of Battens uses **3G - Roof Batten Long.** Place and attach 15 1/2" up from fourth row of Battens as per **Steps 50-51**. Different Spacing is to accommodate overlap of Metal roof Panels in **Step 66**.

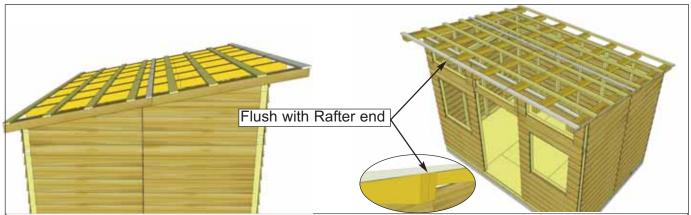


60. Eighth and last row of Battens uses **3H - Roof Batten Short**. Eighth row of Battens should be flush with edge of Rafters. Place and attach approximately 13" up from seventh row of Battens as per **Steps 52-53**.

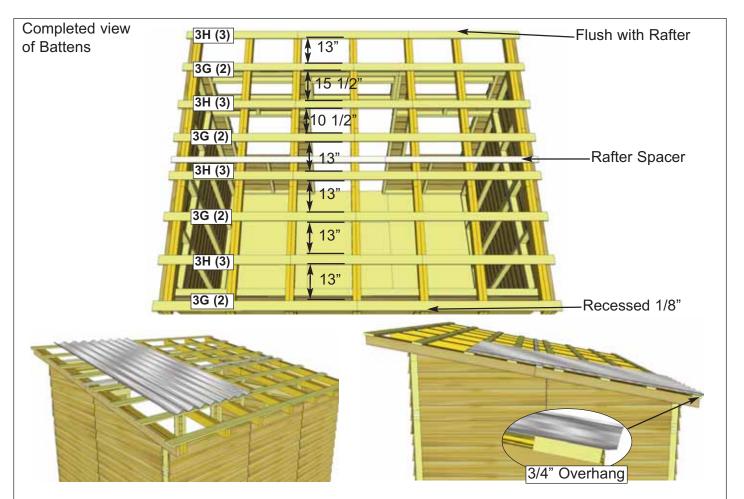


61. Locate **3I - Metal Roof Panels Long**. Start on the low side of the roof and place first Metal roof Panel on lower 6 Battens.Lineup so the sixth Batten is underneath Metal roof panel. Roof Panel should overhang Battens on low side of roof by 3/4". Do not attach Metal Roof Panels onto Battens until all panels are positioned and spaced. In the meantime, have a helper hold the panel in place so it doesn't slide off.

Parts (Steps 61 - 64)
3I - Metal Roof Panels
(Long)
(39" wide x 86" long) x 4
4AP - Foam Enclosures
(Several Pcs)
Hardware
30 - 1/4" x 2" Metal Screws

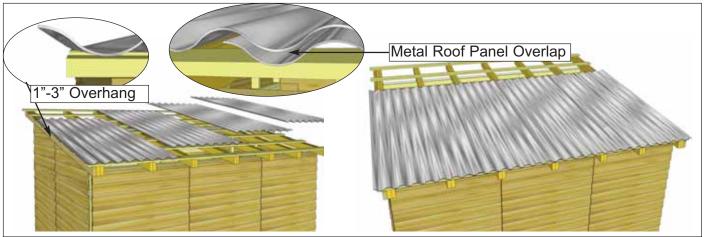



62. Locate remaining **3I - Metal Roof Panels Long** and position on Battens as per **Step 61**. Overelap Metal roof Panels to achieve the desired overall width. Overall width past the end of battens can vary from 1"- 3".

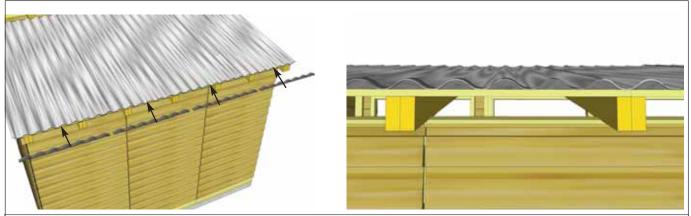


63. Before attaching Metal Roof Panels down, insert **4AP - Foam Enclosures** between Metal Roof Panels and Battens. Foam Enclosures will prevent moisture and unwanted bugs, etc from entering your shed from here.

64. Once Short Metal Roof Panels are spaced correctly from side-toside- and top to bottom, lift panels up and run a bead of caulking down the overlapping seams of each panel to seal the joints.



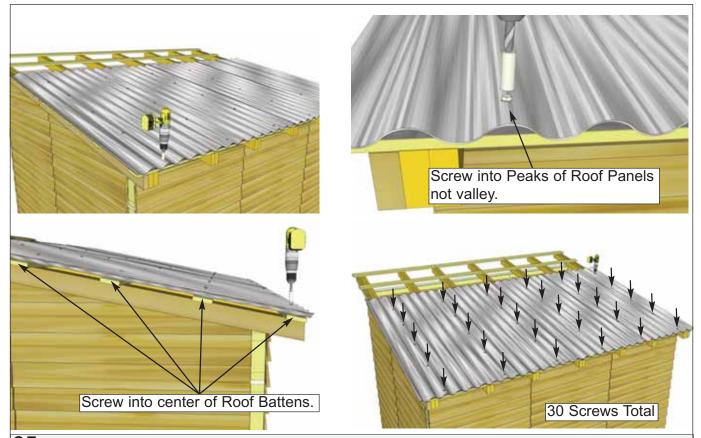

65. Using **30 - 1/4" x 2" Metal Screws** and 3/8" Nut Driver, secure Metal Roof Panels down to each Batten. Metal screw is self-tapping. Do not overtighten! Only attach into lower five rows of Battens. Screw into peaks of Roof Panels not the valleys. Screw into center of Battens.

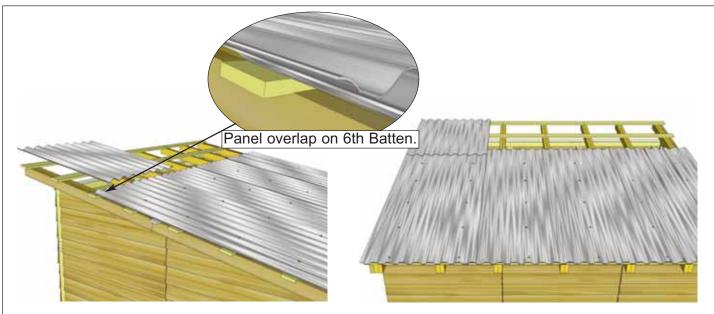

66. Locate **3J - Metal Roof Panels Short**. Place first short roof panel onto Battens and lineup with same overhang as the long roof panels. Roof Panels should overlap on sixth Batten with short panels on top. Panel will overhang door side Batten by approximatley 1". Do not attach Metal Roof Panel until all panels are positioned and spaced. In the meantime, have a helper hold the panel in place so it doesn't slide off.

Parts (Steps 66 - 69)


3J - Metal Roof Panels
(Short)
(39"wide x 41" long) x 4


4AP - Foam Enclosures
(Several Pcs)
Hardware

12 - 1/4" x 2" Metal Screws



67. Locate and position remaining **3J - Metal roof Panels Short** on Battens as per Step 64. Space panels so width matches long roof panels.

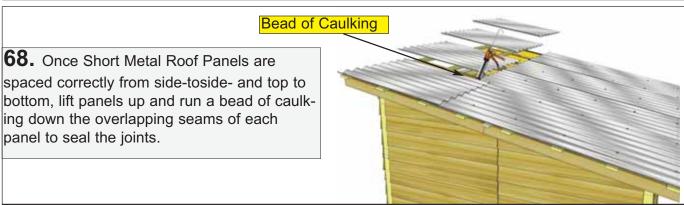

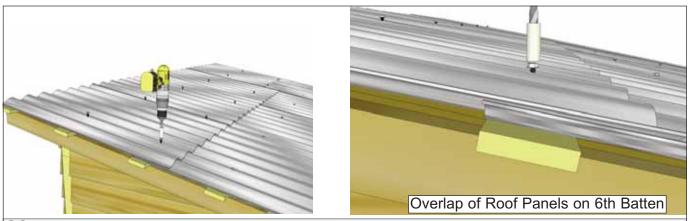

69. Using 12 - 1/4" x 2" Metal Roof Screws and 3/8" Nut Driver, secure Metal Roof Panels down to next two Battens. Final Batten will be used to secure Drip Cap in **Step 84**. Metal screw is self-tapping. Do not overtighten! Screw into peaks of Roof Panels not the valleys. Screw into center of Battens. Where panels overlap ensure to screw through both panels into Batten.



70. Locate **3M** & **3N** - **Roof/Facia Nailing Strips**. Strips will attach to the undeerside of Battens, flush with edge as shown above. Strips provides for a greater nailing surface later when you attach side facia. Attach both pieces with **7** - **1** 1/4" **Screws** total leaving a 1 1/2" gap at front and rear. Evenly space screws. Attach remaining cleats to panels to opposite side.


Parts


- **3M Roof/Facia Nailing Strips** (3/4" x 1 1/2" x 72") **x 2**
- 3N Roof/Facia Nailing Strips (3/4" x 1 1/2" x 44") x 2

Hardware

(S2 - 1 1/4" Screws) x 14 total

4. Trim & Miscellaneous Section

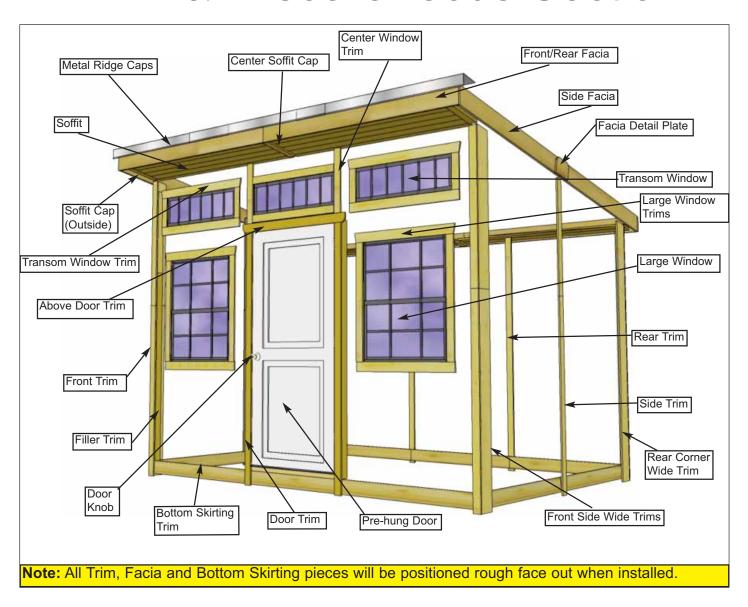

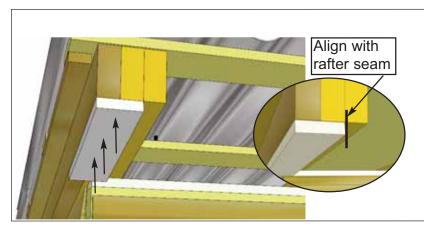


71. Locate **4A - Front Soffit Caps** and position underneath rafter. Align edge with rafter seam and tight against wall. Cap should not extend past end of rafters. Attach with **3 - 1 1/2" Finishing Nails**. Complete opposite side cap now.


Parts

4A - Left/Right Outside Front Soffit Cap (3/4" x 3" x 14") x 2

Hardware

(**N1 - 1 1/2**" **Finishing Nails**) x 6 total

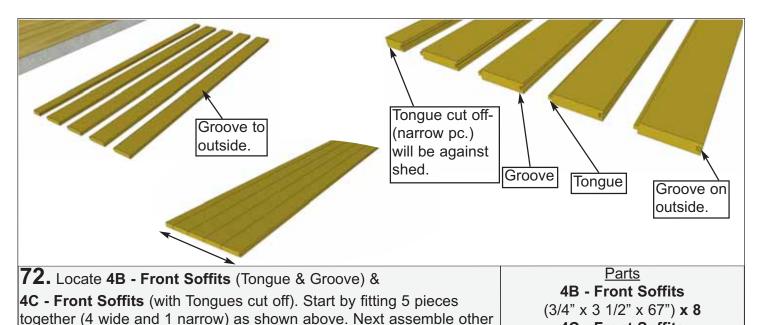

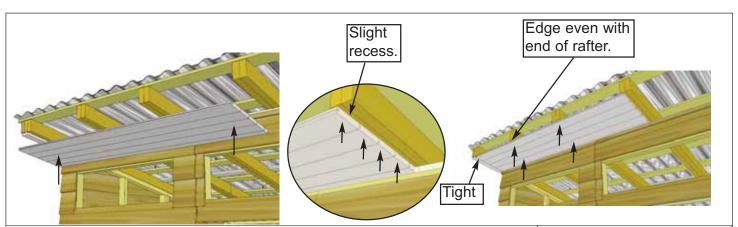


73. Carefully lift one of the front soffit sections and position underneath rafters tight against soffit cap. Front edge of soffit (grooved edge) should not extend past end of rafters. Attach with **12 - 1 1/2**" **Finishing Nails**.

Hardware
N1 - 1 1/2" Finishing Nails
x 12 total

5 pieces the same way.

4C - Front Soffits

(3/4" x 2 1/4" x 67") **x 2**

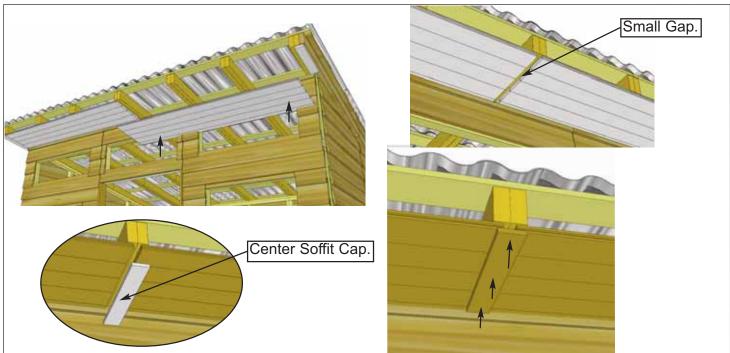

74. Carefully lift, position and attach second soffit section underneath rafters tight against soffit cap as per Step 73. Attach with 12 - 1 1/2" Finishing Nails. Position 4D - Front Soffit Center Cap underneath rafters and over gap where front soffits meet. Attach center cap with 3 - 1 1/2" Finishing Nails.

Parts 4D - Front Soffit Center Cap (1/2" x 2 1/2" x 13 3/4") x 1

Hardware

N1 - 1 1/2" Finishing Nails x 15 total

75. Locate and position 4E - Rear Soffit Caps underneath rear rafter, tight against wall and aligned with rafter seam as per Step 71. Cap should not extend past end of rafters. Attach with 2 - 1 1/2" Finishing Nails. Complete opposite side cap now.

Locate 4F- Rear Soffits (Tongue & Groove) & 4G - Rear Soffits (with tongues cut off).

Start by fitting 2 pieces together (1 wide and 1 narrow) as shown to the right. Assemble other 2 pieces the same way.

Parts

4E - Left/Right Outside Rear Soffit Caps (3/4" x 3" x 6 1/2") **x 2**

4F - Rear Soffits


(3/4" x 3 1/2" x 67") **x 2**


4G - Rear Soffits

 $(3/4" \times 3" \times 67") \times 2$

Hardware

(N1 - 1 1/2" Finishing Nails) x 4 total

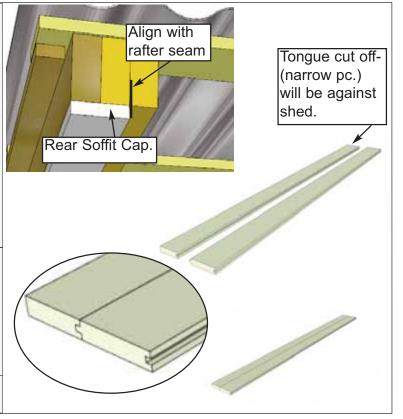

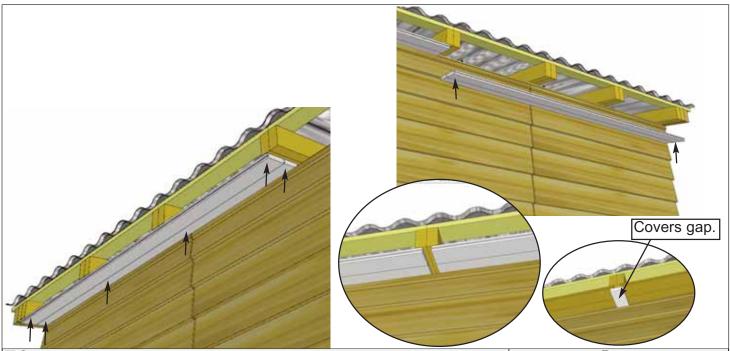

76. Carefully lift one of the rear soffit sections and position underneath rafters tight against soffit cap. Front edge of soffit (grooved edge) should not extend past end of rafters. Attach with 6 - 1 1/2" Finishing Nails per section. Position and attach remaining rear soffit pieces as per Step 74. Position 4H - Rear Center Soffit Cap underneath rafters and over gap where rear soffits meet. Attach center cap with 2 - 1 1/2" Finishing Nails.

Parts
4H - Rear Center Soffit Cap
(1/2" x 3 1/2" x 5 1/4") x 1

Hardware
N1 - 1 1/2" Finishing Nails
x 14 total

77. Position and attach 4I, 4J & 4K

- Top Horizontal Wall Trims. Top trims are pieces of wall siding that are ripped to 1" wide pieces. They fit against the soffit and wall and finish trimming the shed.

Use **3 - 1 1/2" Finishing Nails** to secure each trim.

Parts


4I - Front Top Horizontal Wall Trim (1/2" x 1" x 39") x 1


4J - Front Top Horizontal Wall Trim (1/2" x 1" x 48 3/4") **x 2**

4K - Rear Top Horizontal Wall Trim (1/2" x 1" x 45 1/2") x 3

Hardware


N1 - 1 1/2" Finishing Nails x 18 total

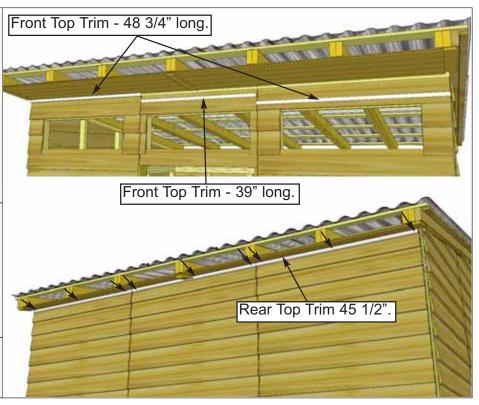

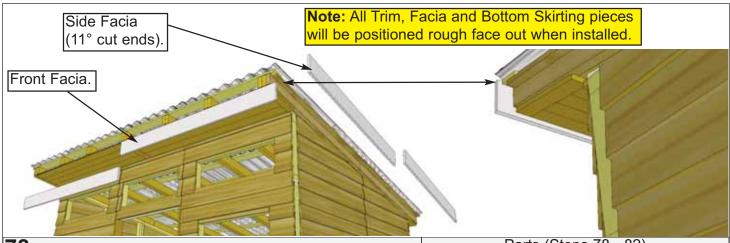

78. Locate **4L - Front/Rear Facia** & **4M - Side Facia**. Start by positioning one front facia up against front end of rafters.

Parts (Steps 78 - 82)
4L - Front/Rear Facia
(3/4" x 5 1/2" x 72 3/4") x 4
4M - Side Facia - 11° cut ends (mirrored)
(3/4" x 5 1/2" x 60") x 4

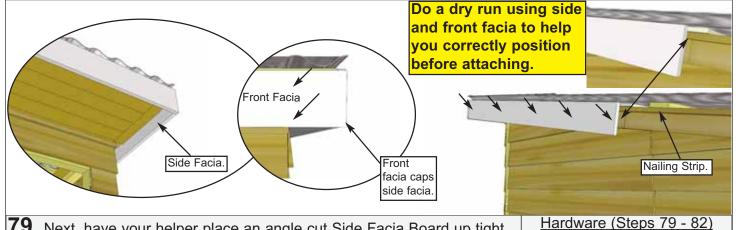


79. Next, have your helper place an angle cut Side Facia Board up tight under metal roof and flush against nailing strip. Line front facia up so it caps the side facia. With front facia correctly aligned, attach front facia to rafter ends with **8 - 1 1/2**" **Finishing Nails**. Attach side facia to edge of nailing strip and batten ends with **5 - 1 1/2**" **Finishing Nails**.


N1 - 1 1/2" Finishing Nails
x 52 total




80. Align and attach remaining front facia as per **Step 79**. Align next two side facias on opposite side as first side facia. Once again, do a dry run before attaching. There will be a Facia Detail Plate attached in **Step 85** to hide any gaps where facia pieces meet in the middle.

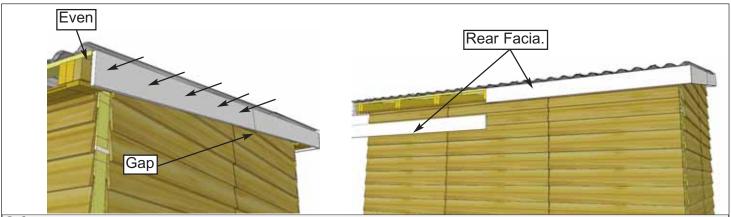

81. After aligning two side facias and first rear facia, attach as per **Steps 78-80**. Once again, do a dry run before attaching.

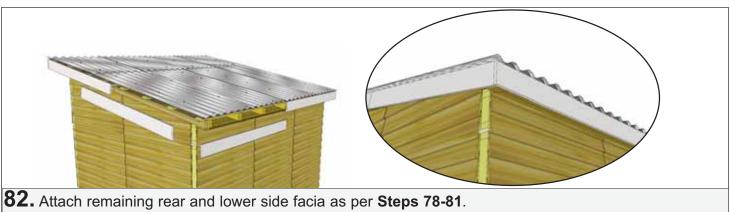


&Z. Attach remaining rear and lower side facia as per **Steps 78-81**.

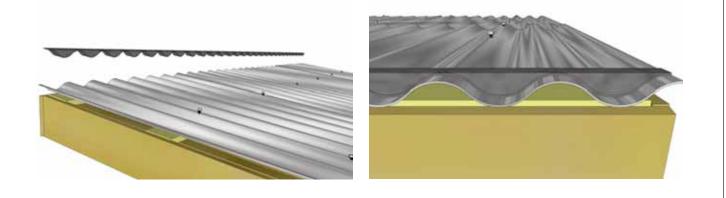

83. Locate remaining **4AP - Foam Enclosures for Metal Roof**. Before attaching Metal Ridge Caps, place strips of Foam Enclosures near to top. Foam Enclosures will prevent moisture, unwanted insects, etc.. from entering your shed.

Parts **4AP - Foam Enclosures**(Several Pcs)

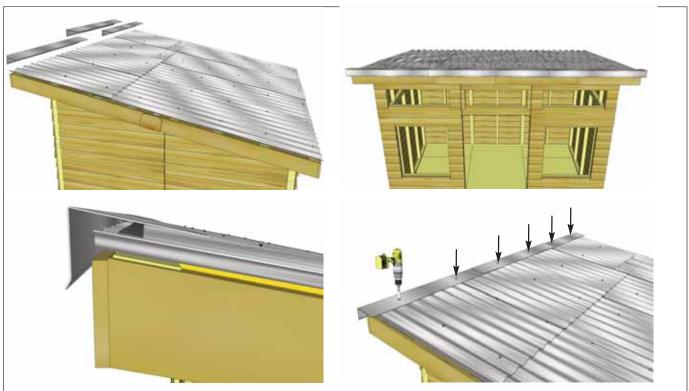


84. Locate **3K - Metal Drip Caps** and place on high side of metal roof. Evenly space from side-to-side allowing caps to overlap eachother. Overhang the cap approximatley 1" past each end. Secure with **6 - 5/26" x 7/8" metal drip cap screws**, screwing into final roof Batten

Parts

3K - Metal Drip Caps
(60" long angled) x 3

Hardware
(1/4" x 2" Metal Roof Screws)
x 6

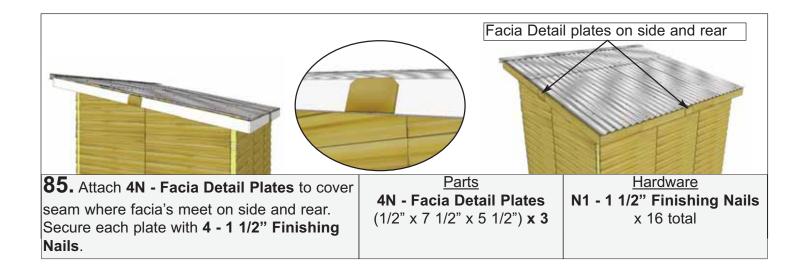




86. Attach **40 - Bottom Skirting** around base of the shed. Skirting will hide floor framing. The side skirting pieces will meet together in the center. Gaps on outside will be covered by wide trim pieces later. Start with side skirting pieces first and attach each with **4 - 1 1/2" Finishing Nails**.


Parts (Steps 86 - 88)

40 - Side/Rear Bottom Skirting
(1/2" x 4 1/2" x 45 1/2") x 7

Hardware (Steps 86 - 88)
N1 - 1 1/2" Finishing Nails
x 28 total



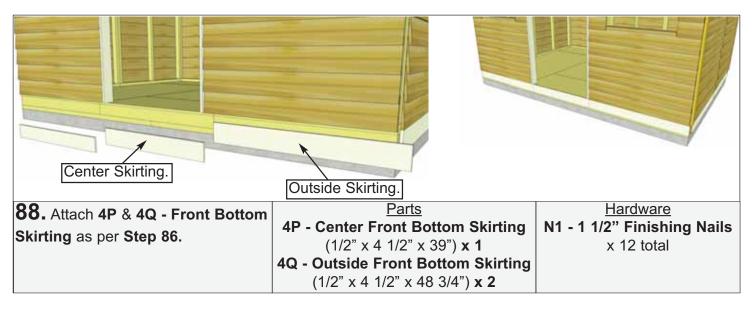


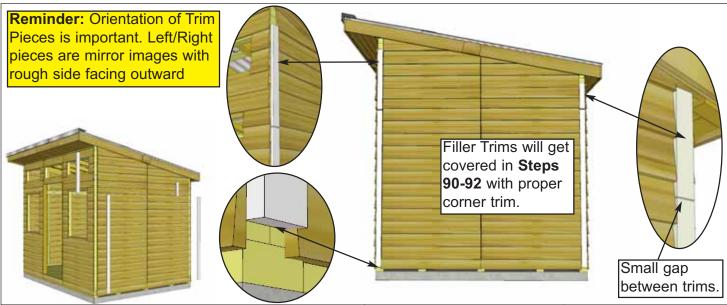

89. Position **4R - Filler Trim** (they serve as nailing strips) in corner of side wall, aligned flush with top of bottom skirting. Attach with 4 - 1 1/4" Screws and repeat for all 4 corners. Next. attach 4S & 4T -Front/Rear Top Filler Trim with 2 - 1 1/4" Screws per piece.

Parts 4R - Filler Trim (3/4" x 2 1/2" x 72") **x 4** 4S - Front Top Filler Trim (3/4" x 2 1/2" x 28 1/2") x 2 4T - Rear Top Filler Trim (3/4" x 2 1/2" x 12") **x 2**

Hardware S2 - 1 1/4" Screws x 22 total

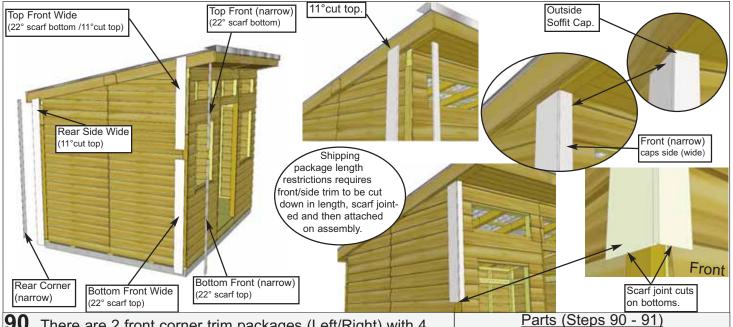


90. There are 2 front corner trim packages (Left/Right) with 4 pieces per package which are needed to complete each corner. Start with the left side corner trim package by placing 4U - Top Front Narrow Corner Trim tight underneath soffit cap and 4V - Top Front Side Wide Corner Trim tight underneath rafter facia so it is capped by the narrow trim. When correctly aligned, attach each trim with 6 - 1 1/2" Finishing Nails. Have helper assist by holding trim.

4U - Top Front Narrow Corner Trim with 22° scarf cut bottom (1/2" x 2 1/2" x 46") **x 2**

4V - Top Front Side Wide Corner Trim with 22° scarf cut bottom / 11° cut top (1/2" x 5 1/2" x 46 1/2") **x 2**

Hardware (Steps 90 - 91) (N1 - 1 1/2" Finishing Nails) x 56 total

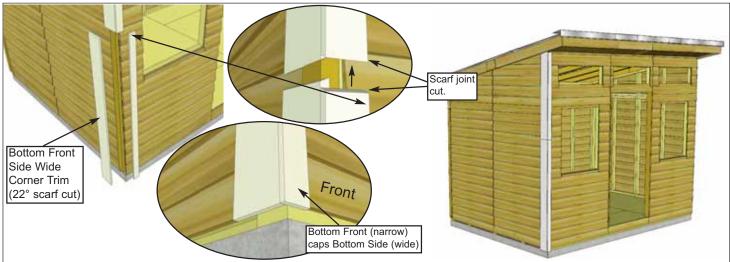


91. From the Left Corner Trim package, locate **4W** -Bottom Front Narrow Corner Trim and 4X - Bottom Front Side Wide Corner Trim. Position scarf joint of 4W tight underneath scarf joint of 4U - Top Front Narrow Trim from previous step. Secure with 8 - 1 1/2" Finishing Nails. Align scarf joint of 4X with scarf joint of 4V - Top Wide Trim from previous step. Attach with 8 - 1 1/2" Finishing Nails. Locate Right Side Front Corner Trim Package and repeat as per Steps 90.

Parts

4W - Bottom Front Narrow Corner Trim with 22° scarf cut top (1/2" x 2 1/2" x 62") x 2

4X - Bottom Front Side Wide Corner Trim with 22° scarf cut top (1/2" x 5 1/2" x 62") **x 2**

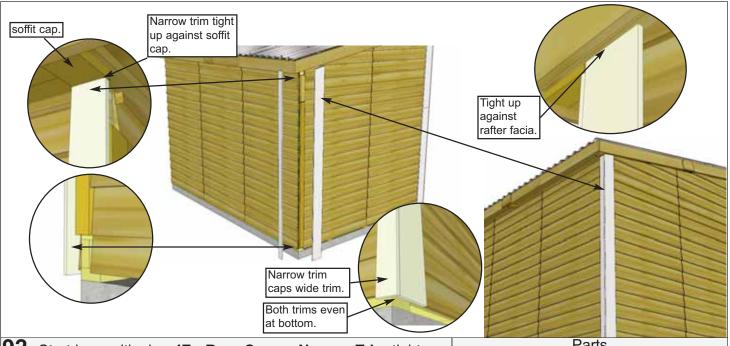

92. Start by positioning **4Z - Rear Corner Narrow Trim** tight against soffit cap on rear wall siding. Next, position 4Y - Rear Side Wide Corner Trim on side wall so it caps the narrow trim. When correctly aligned, attach each trim with 10 - 1 1/2" **Finishing Nails**. Have helper assist by holding trim. Repeat for opposite side.


Parts

4Y - Rear Side Wide Corner Trim with 11° cut top - mirrored (1/2" x 5 1/2" x 91") **x 2**

4Z - Rear Corner Narrow Trim (1/2" x 2 1/2" x 89") **x 2**

Hardware

(N1 - 1 1/2" Finishing Nails) x 40 total

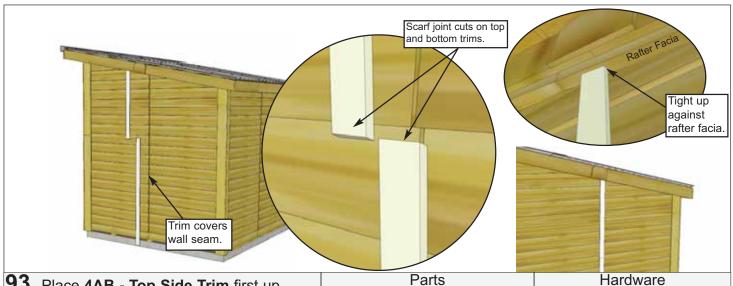

93. Place 4AB - Top Side Trim first up against rafter facia and evenly spaced to cover wall seam. Attach with 4 - 1 1/2" Finishing Nails. Place 4AC - Bottom Side Trim against wall seam and line up scarf joints. Attach with 4 - 1 1/2" Finishing Nails. Complete other side now.

4AB - Top Side Trim

with 22° Scarf cut / 11° cut top

(1/2" x 2 1/2" x 37 3/4") x 2

4AC - Bottom Side Trim

with 22° Scarf cut top


(1/2" x 5 1/2" x 62") x 2

N1 - 1 1/2" Finishing Nails
x 16 total

94. Position **4AD - Rear Wall Trim** up tight underneath rear soffit and evenly spaced to cover wall seam. Attach with **8 - 1 1/2**" **Finishing Nails**. Complete both trims now.

Parts **4AD - Rear Wall Trim** (1/2" x 2 1/2" x 89") **x 2**


<u>Hardware</u> (**N1 - 1 1/2" Finishing Nails**) x 16 total





95. Locate **4AE - Pre-Hung Door.** Door opening is 38" w x 80 1/4" h. Place door in opening. Use **4AO - Shim Shingles** to shim door tight in cavity. Once shim is wedged in, cut excess shingle wood off. Insert 4-8 shim shingles.

Parts 4AE - Pre-Hung Door (37 1/2" x 80") x 1 (4AR - Shim Shingles) x 8

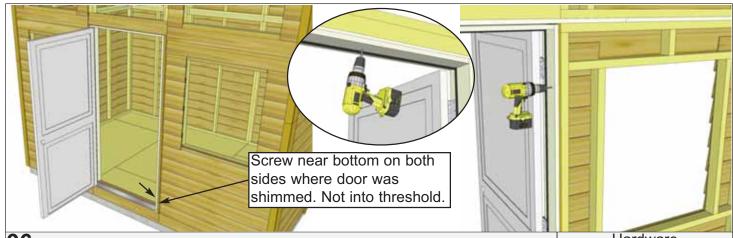

96. With door leveled in opening, open door and secure casing to shed framing where you shimmed. Use **2 - 2 1/2" Screws** on top and **3 - 2 1/2" Screws** on each side. Do not screw into threshold.

Hardware
S1 - 2 1/2" Screws
x 8 total




97. Before trimming door out, open/close door and confirm for level. Make any adjustments now. Locate **4AF - Above Door Filler Trim - Bevel**. Position over door casing with thick end of piece up and recessed slightly. Attach with **4 - 1 1/2" Finishing Nails**.

Parts


4AF - Above Door Filler Trim - Bevel
(1/2" x 1 3/4" x 40") x 1

Hardware
(N1 - 1 1/2" Finishing Nails) x 4 total

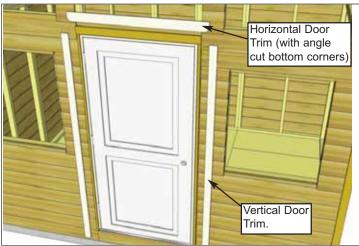



4 - 1 1/2" Finishing Nails.



Parts

4AG - Vertical Door Trim
(1/2" x 2 1/2" x 84") x 2

4AH - Horizontal Door Trim
(1/2" x 3" x 44 1/2") x 1

Hardware
N1 - 1 1/2" Finishing Nails
x 20 total




99. To reduce possible water from penetrating into the window cavity, caulk gap on both sides of window opening prior to installing the **4AI - Large Window Inserts.** Position insert in cavity and secure with **8 - 1 1/4" Screws**. Make sure to screw insert into the thick butt of the siding only.


Parts (Steps 99 - 101)

4AI - Large Window Inserts
(30 1/4"w x 35"h) x 2

Hardware (Steps 99 - 101) (**S2 - 1 1/4" Screws**) x 16 total

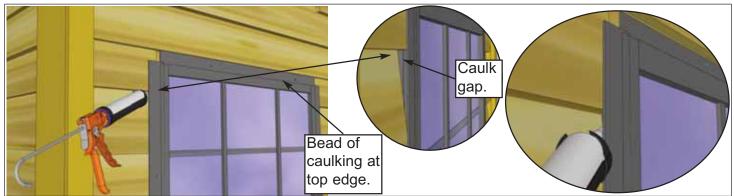

100. Once Insert is attached, caulk the "triangular gap" between the Insert's outside flange and the siding. Also put a bead of caulking horizontally at top of window where the flange and siding meet. This additional caulking will also will reduce the chances of moisture entering into your shed.

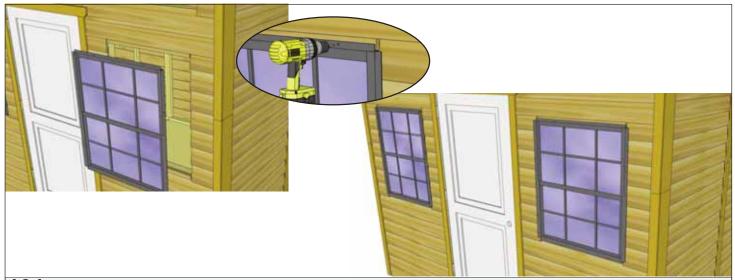

101. Insert second large window insert and attach and caulk as per Steps 99-100. Window Trims in Step 103 will be installed to hide caulking.








Parts Hardware

102. Install the three 4AJ - Transom Window Inserts with 6 - 1 1/4" Screws as per Steps 99-100.

4AJ - Transom Window Inserts (S2 - 1 1/4" Screws) x 18 total (35"w x 10 1/8"h) x 3

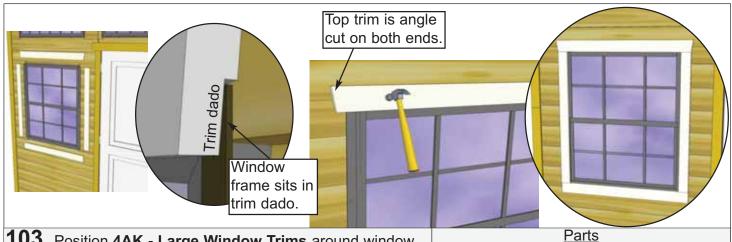


103. Position 4AK - Large Window Trims around window, doing a dry run first. Attach with 4 - 1 1/2" Finishing Nails per piece. Window trim has a small dado on reverse face. Outside frame of window will roughly sit in the dado to give a better fit. Complete other large window the same way.

4AK - Large Window Trims

(1 Top piece - 36 1/4" angle cut ends) x 2 (2 Side pieces - 36 1/8" sq.cut) x 2 (1 Bottom piece - 35 1/4" sq.cut) x 2

Hardware


(N1 - 1 1/2" Finishing Nails) x 32 total

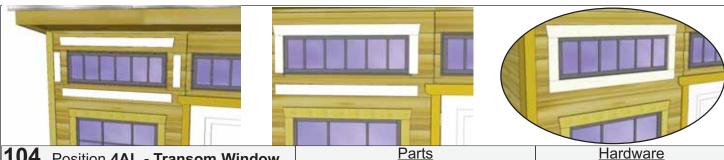

104. Position 4AL - Transom Window Trim around window, doing a dry run first. Attach with as per Step 103 with 4 - 1 1/2" Finishing Nails per large piece and 2 - 1 1/2" Finishing Nails per short piece. Complete other side window.

4AL - Transom Window Trim
(1 Top piece - 41" angle ends) x 2
(2 Side pieces - 10 5/8" sq.cut) x 2
(1 Bottom piece - 40" sq.cut) x 2


N1 - 1 1/2" Finishing Nails
x 24 total

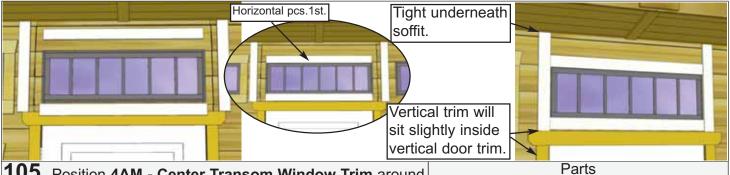

105. Position **4AM - Center Transom Window Trim** around window doing a dry run first. Attach horizontal trim first and then the verticals with **4 - 1 1/2" Finishing Nails** per piece.

4AM - Center Transom Window Trim
(Top & Bottom pieces - 35 3/4" sq. cut) x 2
(Side pieces - 20 1/2" sq.cut) x 2

Hardware
N1 - 1 1/2" Finishing Nails
x 16 total

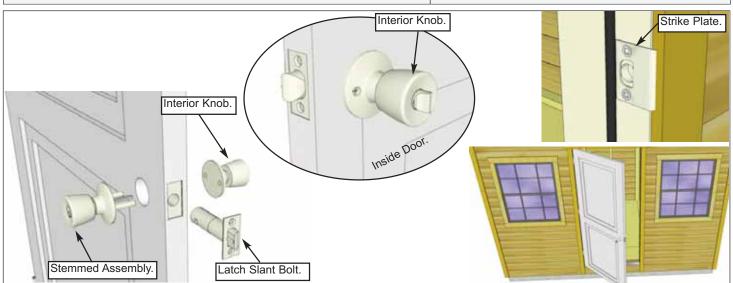

106. Locate Door Knob Package. Included in the package will be the Stemmed Assembly, Interior Knob, Latch Slant Bolt, Strike Plate and Screws (Phillips Head Screw Driver Required). Insert Latch with Slant Bolt facing to the interior of the shed. Install Stemmed Assembly. Install Interior Knob with screws (Robertson Screw Driver may be required). Install Strike Plate on Door Casing. Open and close door and make any adjustments necessary.



Congratulations on assembling your 12x8 Studio Garden Shed!

Note: Our Sheds are shipped as unfinished products. If exposed to the elements, the western red cedar lumber will weather to a silvery-gray color. If you prefer to keep the cedar lumber looking closer to the original color, we suggest that you treat the wood with a good oil base wood stain. You may also wish to paint your new shed rather than stain it. In both cases we recommend that you consult with a paint and stain dealer in your area for their recommendations.

We hope your experience assembling your 12x8 Studio Garden Shed has been both positive and rewarding.



We value your feedback and would like to hear back from you on how well we are doing in the following areas:


- 1. Customer Service
- 2. On Time Shipping
- 3. Motor Freight Delivery
- 4. Quality of Materials
- 5. Assembly Manual
- 6. Overall Satisfaction.

Please call, write or email us at:

Outdoor Living Today
Canadian Address
9393 287th Street
Maple Ridge, British Columbia
Canada V2W 1L1

Toll Line: 1.888.658.1658

United States Address P.O. Box 96 Sumas, Washington USA 98295



sales@outdoorlivingtoday.com

Fax: 1.604.462.5333